





## Circuit-breaker, 3p, 250A, withdrawable unit

Part no. **NZMH3-S250-AVE**  
 Catalog No. **113566**

Similar to illustration

## Delivery program

|   |                          |    |  |  |
|---|--------------------------|----|--|--|
| Product range   |                          |    |  | Circuit-breaker  |
| Protective function   |                          |    |  | Short-circuit protection   |
| Standard/Approval   |                          |    |  | IEC  |
| Installation type   |                          |    |  | Withdrawable   |
| Release system  |                          |    |  | Thermomagnetic release   |
| Construction size   |                          |    |  | NZM3   |
| Description   |                          |    |  | Motor protection in conjunction with overload relay<br>With short-circuit release<br>Without overload release Ir<br>IEC/EN 60947-4-1, IEC/EN 60947-2<br><br>The circuit-breaker fulfills all requirements for AC-3 switching category. |
| Number of poles   |                          |    |  | 3 pole   |
| Standard equipment  |                          |    |  | Screw connection   |
| Rated current = rated uninterrupted current   | $I_n = I_u$              | A  |  | 250  |
| <b>Switching capacity</b>   |                          |    |  |  |
| 400/415 V 50 Hz   | $I_{cu}$                 | kA |  | 150  |
| <b>Setting range</b>  |                          |    |  |  |
| Short-circuit releases  |                          |    |  |  |
|  |                          |    |  |  |
| Non-delayed   | $I_i = I_n \times \dots$ |    |  | 8 - 14   |
|  |                          |    |  |  |
| <b>Motor rating AC-3 at 400 V 50/60 Hz</b>  |                          |    |  |  |
| 380 V 400 V   | P                        | kW |  | 132  |
| <b>Rated operational current AC-3 at 400 V 50/60 Hz</b>                             |                          |    |  |  |
| 400 V   | $I_e$                    | A  |  | 231  |

## Technical data

### General

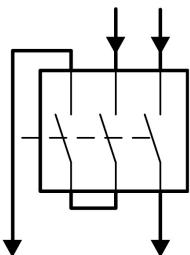
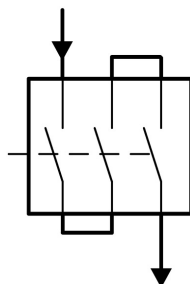

|   |  |      |  |  |
|---|--|------|--|--|
| Standards   |  |      |  | IEC/EN 60947   |
| Protection against direct contact   |  |      |  | Finger and back of hand proof to VDE 0106 Part 100                             |
| Climatic proofing   |  |      |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature   |  |      |  |  |
| Ambient temperature, storage  |  | °C   |  | -40 - +70  |
| Operation   |  | °C   |  | -25 - +70  |
| Mechanical shock resistance (10 ms half-sinusoidal shock) according to IEC 60068-2-27 |  | g    |  | 20 (half-sinusoidal shock 20 ms)   |
| Safe isolation to EN 61140  |  |      |  |  |
| Between auxiliary contacts and main contacts  |  | V AC |  | 500  |
| between the auxiliary contacts  |  | V AC |  | 300  |
| Weight  |  | kg   |  | 6.34   |
| Mounting position   |  |      |  | Vertical and 90° in all directions   |



With XFI earth-fault release:  
 - NZM1, N1, NZM2, N2: vertical and 90° in all directions  
 with plug-in unit  
 - NZM1, N1, NZM2, N2: vertical, 90° right/left  
 with withdrawable unit:  
 - NZM3, N3: vertical, 90° right/left  
 - NZM4, N4: vertical  
 with remote operator:  
 - NZM2, N(S)2, NZM3, N(S)3, NZM4, N(S)4: vertical and 90° in all directions

|  |  |  |
|--|--|--|
| Direction of incoming supply           |  | as required  |
| Degree of protection                   |  |  |
| Device                                 |  | In the operating controls area: IP20 (basic degree of protection)        |
| Enclosures                             |  | With insulating surround: IP40<br>With door coupling rotary handle: IP66 |
| Terminations                           |  | Tunnel terminal: IP10<br>Phase isolator and strip terminal: IP00         |
| Other technical data (sheet catalogue) |  | Temperature dependency, Derating   |

### Circuit-breakers

|   |             |      |   |
|---|-------------|------|---|
| Rated current = rated uninterrupted current | $I_n = I_u$ | A    | 250   |
| Rated surge voltage invariability           | $U_{imp}$   |      |   |
| Main contacts                               |             | V    | 8000  |
| Auxiliary contacts                          |             | V    | 6000  |
| Rated operational voltage                   | $U_e$       | V AC | 690   |
|   |             |      | <p>Details apply for 3 pole system protection circuit-breaker with thermomagnetic release NZMN(H)1(2)(3)-A... to 500 A.</p> <p>For rated operating voltage switching via 3 contacts:</p> <p>DC correction factor for instantaneous release response value: NZM1: 1.25, NZM2: 1.35, NZM3: 1.45</p> <p>Set value for <math>I_i</math> at DC = set value <math>I_i</math> AC/correction factor DC</p> <p><b>Switching of one pole via two series contacts</b></p>  <p><b>Switching of one pole via three series contacts</b></p>  |
| Overvoltage category/pollution degree       |             |      | III/3   |
| Rated insulation voltage                    | $U_i$       | V    | 1000  |
| Use in unearthed supply systems             |             | V    |  690   |

### Switching capacity

|  |          |    |     |
|--|----------|----|-----|
| Rated short-circuit making capacity            | $I_{cm}$ |    |     |
| 240 V  | $I_{cm}$ | kA | 330 |
| 400/415 V                                      | $I_{cm}$ | kA | 330 |
| 440 V 50/60 Hz                                 | $I_{cm}$ | kA | 286 |
| 525 V 50/60 Hz                                 | $I_{cm}$ | kA | 143 |
| 690 V 50/60 Hz                                 | $I_c$    | kA | 74  |
| Rated short-circuit breaking capacity $I_{cn}$ | $I_{cn}$ |    |     |
| $I_{cu}$ to IEC/EN 60947 test cycle O-t-CO     | $I_{cu}$ | kA |     |
| 240 V 50/60 Hz                                 | $I_{cu}$ | kA | 150 |
| 400/415 V 50/60 Hz                             | $I_{cu}$ | kA | 150 |
| 440 V 50/60 Hz                                 | $I_{cu}$ | kA | 130 |
| 525 V 50/60 Hz                                 | $I_{cu}$ | kA | 65  |

|   |                 |       |   |
|---|-----------------|-------|---|
| 690 V 50/60 Hz  | I <sub>CU</sub> | kA    | 35  |
| I <sub>cs</sub> to IEC/EN 60947 test cycle O-t-CO-t-CO                              | I <sub>cs</sub> | kA    |   |
| 240 V 50/60 Hz  | I <sub>cs</sub> | kA    | 150   |
| 400/415 V 50/60 Hz  | I <sub>cs</sub> | kA    | 150   |
| 440 V 50/60 Hz  | I <sub>cs</sub> | kA    | 130   |
| 525 V 50/60 Hz  | I <sub>cs</sub> | kA    | 33  |
| 690 V 50/60 Hz  | I <sub>cs</sub> | kA    | 9   |
|   |                 |       | Maximum back-up fuse, if the expected short-circuit currents at the installation location exceed the switching capacity of the circuit-breaker. |
| <b>Rated short-time withstand current</b>   |                 |       |   |
| t = 0.3 s   | I <sub>cw</sub> | kA    | 3.3   |
| t = 1 s   | I <sub>cw</sub> | kA    | 3.3   |
| <b>Utilization category to IEC/EN 60947-2</b>                                       |                 |       |   |
| <b>Rated making and breaking capacity</b>   |                 |       |   |
| <b>Rated operational current</b>  |                 |       |   |
| AC-1  | I <sub>e</sub>  | A     |   |
| 380 V 400 V   | I <sub>e</sub>  | A     | 250   |
| 415 V   | I <sub>e</sub>  | A     | 250   |
| 690 V   | I <sub>e</sub>  | A     | 250   |
| AC--3   |                 |       |   |
| 380 V 400 V   | I <sub>e</sub>  | A     | 250   |
| 415 V   | I <sub>e</sub>  | A     | 250   |
| 660 V 690 V   | I <sub>e</sub>  | A     | 250   |
| <b>Lifespan, mechanical (of which max. 50 % trip by shunt/undervoltage release)</b> |                 |       |   |
| <b>Lifespan, electrical</b>   |                 |       |   |
| <b>AC-1</b>   |                 |       |   |
| 400 V 50/60 Hz  | Operations      |       | 5000  |
| 415 V 50/60 Hz  | Operations      |       | 5000  |
| 690 V 50/60 Hz  | Operations      |       | 3000  |
| <b>AC--3</b>  |                 |       |   |
| 400 V 50/60 Hz  | Operations      |       | 2000  |
| 415 V 50/60 Hz  | Operations      |       | 2000  |
| 690 V 50/60 Hz  | Operations      |       | 2000  |
| <b>Max. operating frequency</b>   |                 |       |   |
|   |                 | Ops/h | 60  |
| <b>Total downtime in a short-circuit</b>  |                 |       |   |
|   |                 | ms    | < 10  |

### Terminal capacity

|   |  |                 |   |
|---|--|-----------------|---|
| Standard equipment                            |  |                 | Screw connection                                      |
| Accessories required                          |  |                 | NZM3-XAVS   |
| Optional accessories                          |  |                 | Box terminal<br>Tunnel terminal<br>connection on rear |
| <b>Round copper conductor</b>                 |  |                 |   |
| <b>Box terminal</b>                           |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 2 x 16  |
| Stranded                                      |  | mm <sup>2</sup> | 1 x (35 - 240)<br>2 x (25-120)                        |
| <b>Tunnel terminal</b>                        |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x 16  |
| Stranded                                      |  | mm <sup>2</sup> |   |
| 1-hole  |  | mm <sup>2</sup> | 1 x (16 - 185)  |
| 2-hole  |  | mm <sup>2</sup> | 1 x (50 - 240)<br>2 x (50 - 240)                      |
| <b>Bolt terminal and rear-side connection</b> |  |                 |   |
| <b>Direct on the switch</b>                   |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x 16<br>2 x 16                                      |

|   |      |                 |   |
|---|------|-----------------|---|
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 240)<br>2 x (25 - 240)  |
| Connection width extension                                |      | mm <sup>2</sup> |   |
| Connection width extension                                |      | mm <sup>2</sup> | 2 x 300   |
| Al conductors, Cu cable                                   |      |                 |   |
| Solid   |      | mm <sup>2</sup> | 1 x 16  |
| Stranded  |      | mm <sup>2</sup> |   |
| Stranded  |      | mm <sup>2</sup> | 1 x (25 - 185) <sup>2)</sup>  |
|   |      |                 | <sup>2)</sup> Up to 240 mm <sup>2</sup> can be connected depending on the cable manufacturer. |
| 2-hole  |      | mm <sup>2</sup> | 1 x (50 - 240)<br>2 x (50 - 240)  |
| Cu strip (number of segments x width x segment thickness) |      |                 |   |
| Box terminal  |      |                 |   |
|   | min. | mm              | 6 x 16 x 0.8  |
|   | max. | mm              | 10 x 24 x 1.0<br>+ 5 x 24 x 1.0<br>(2 x) 8 x 24 x 1.0   |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Flat copper strip, with holes                             | min. | mm              | 6 x 16 x 0.8  |
| Flat copper strip, with holes                             | max. | mm              | 10 x 32 x 1.0 + 5 x 32 x 1.0  |
| Connection width extension                                |      | mm              | (2 x) 10 x 50 x 1.0   |
| Copper busbar (width x thickness)                         |      |                 |   |
| Bolt terminal and rear-side connection                    |      |                 |   |
| Screw connection  |      |                 | M10   |
| Direct on the switch                                      |      |                 |   |
|   | min. | mm              | 20 x 5  |
|   | max. | mm              | 30 x 10<br>+ 30 x 5   |
| Connection width extension                                |      | mm              |   |
| Connection width extension                                | max. | mm              | 2 x (10 x 50)   |
| Control cables  |      |                 |   |
|   |      | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 1.5)  |

## Design verification as per IEC/EN 61439

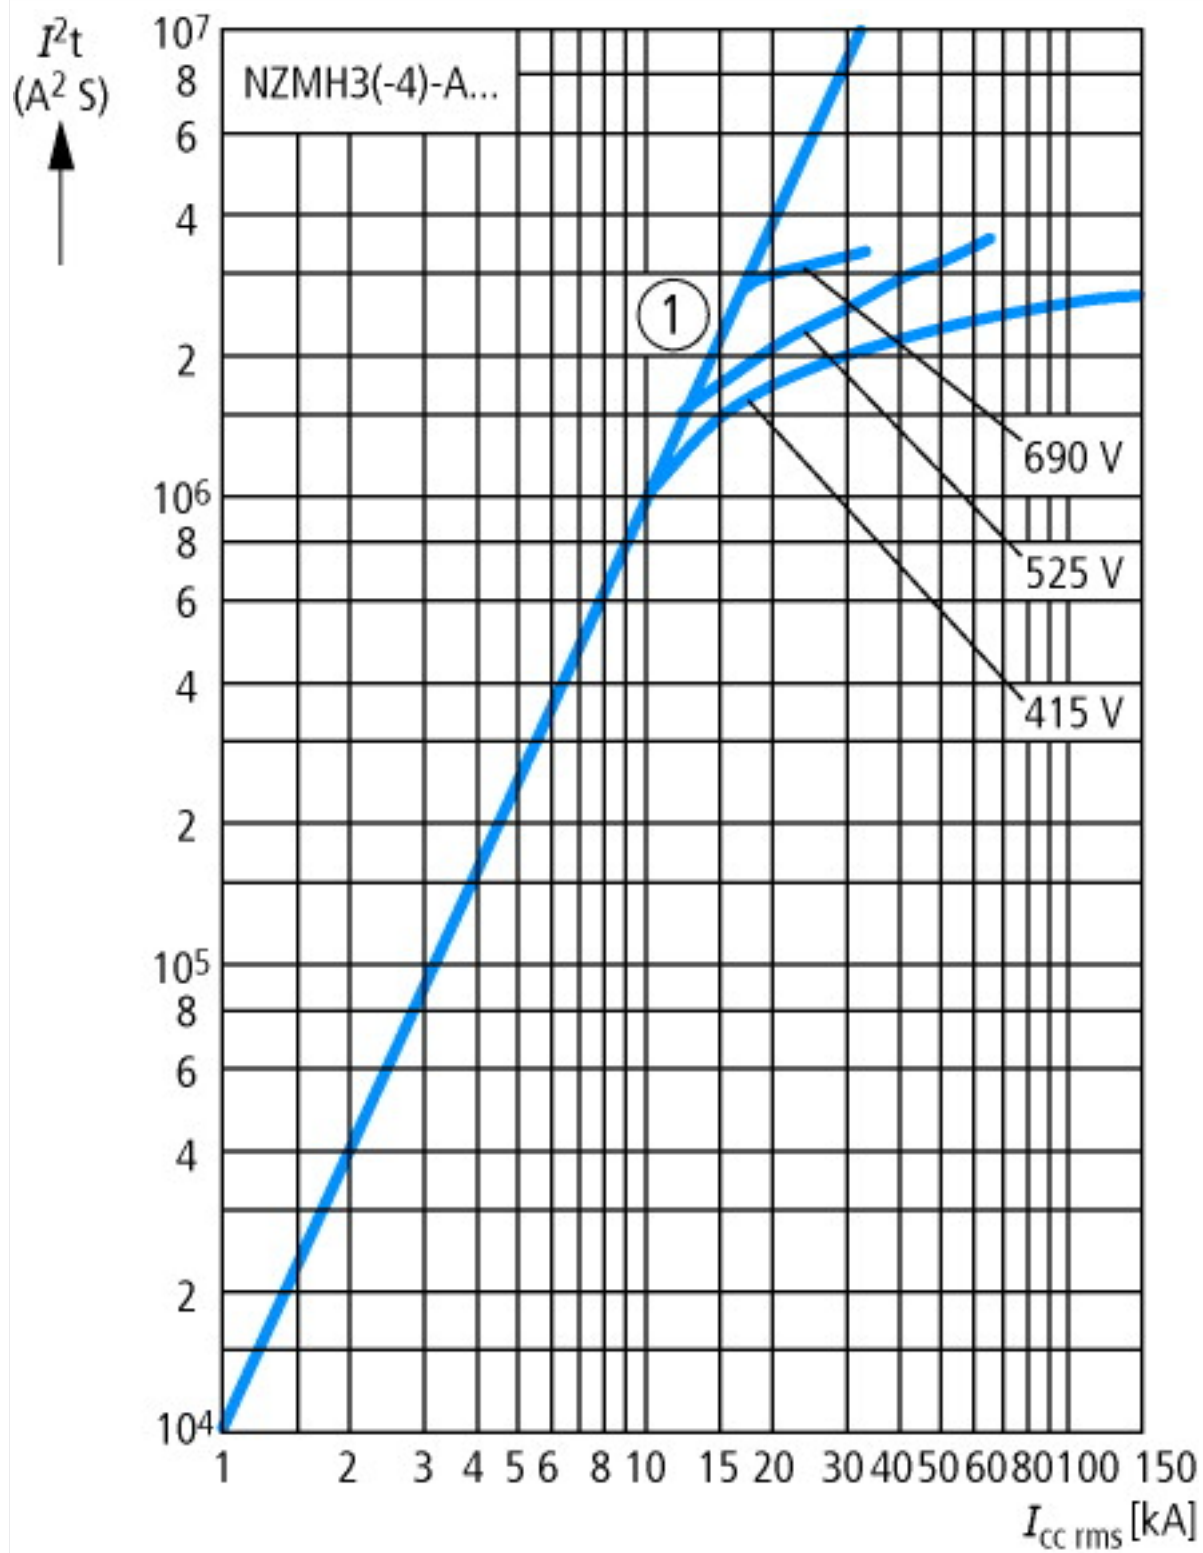
|  |                  |    |  |
|--|------------------|----|--|
| Technical data for design verification   |                  |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>   | A  | 250  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub> | W  | 68.25  |
| Operating ambient temperature max.   |                  | °C | -25  |
| Operating ambient temperature max.   |                  | °C | 70   |
| IEC/EN 61439 design verification   |                  |    |  |
| 10.2 Strength of materials and parts   |                  |    |  |
| 10.2.2 Corrosion resistance  |                  |    | Meets the product standard's requirements.                         |
| 10.2.3.1 Verification of thermal stability of enclosures   |                  |    | Meets the product standard's requirements.                         |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                  |    | Meets the product standard's requirements.                         |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                  |    | Meets the product standard's requirements.                         |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                  |    | Meets the product standard's requirements.                         |
| 10.2.5 Lifting   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions  |                  |    | Meets the product standard's requirements.                         |
| 10.3 Degree of protection of ASSEMBLIES  |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances   |                  |    | Meets the product standard's requirements.                         |
| 10.5 Protection against electric shock   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components   |                  |    | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections  |                  |    | Is the panel builder's responsibility.                             |

|  |  |  |
|--|--|--|
| 10.8 Connections for external conductors                 |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties                               |  |  |
| 10.9.2 Power-frequency electric strength                 |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage                         |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise                                   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                               |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                      |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 6.0

|  |    |   |
|--|----|---|
| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)   |    |   |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss8.1-27-37-04-01 [AGZ529013]) |    |   |
| Overload release current setting   | A  | 0 - 0   |
| Adjustment range undelayed short-circuit release   | A  | 2000 - 2500                                       |
| Thermal protection   |    | No  |
| Phase failure sensitive  |    | No  |
| Switch off technique   |    | Magnetic  |
| Rated operating voltage  | V  | 690 - 690   |
| Rated permanent current I <sub>u</sub>   | A  | 250   |
| Rated operation power at AC-3, 230 V   | kW | 75  |
| Rated operation power at AC-3, 400 V   | kW | 132   |
| Type of electrical connection of main circuit  |    | Screw connection                                  |
| Type of control element  |    | Rocker lever                                      |
| Device construction  |    | Built-in device slide-in technique (withdrawable) |
| With integrated auxiliary switch   |    | No  |
| With integrated under voltage release  |    | No  |
| Number of poles  |    | 3   |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, AC   | kA | 150   |
| Degree of protection (IP)  |    | IP20  |
| Height   | mm | 260   |
| Width  | mm | 185   |
| Depth  | mm | 346   |


## Characteristics



## Dimensions

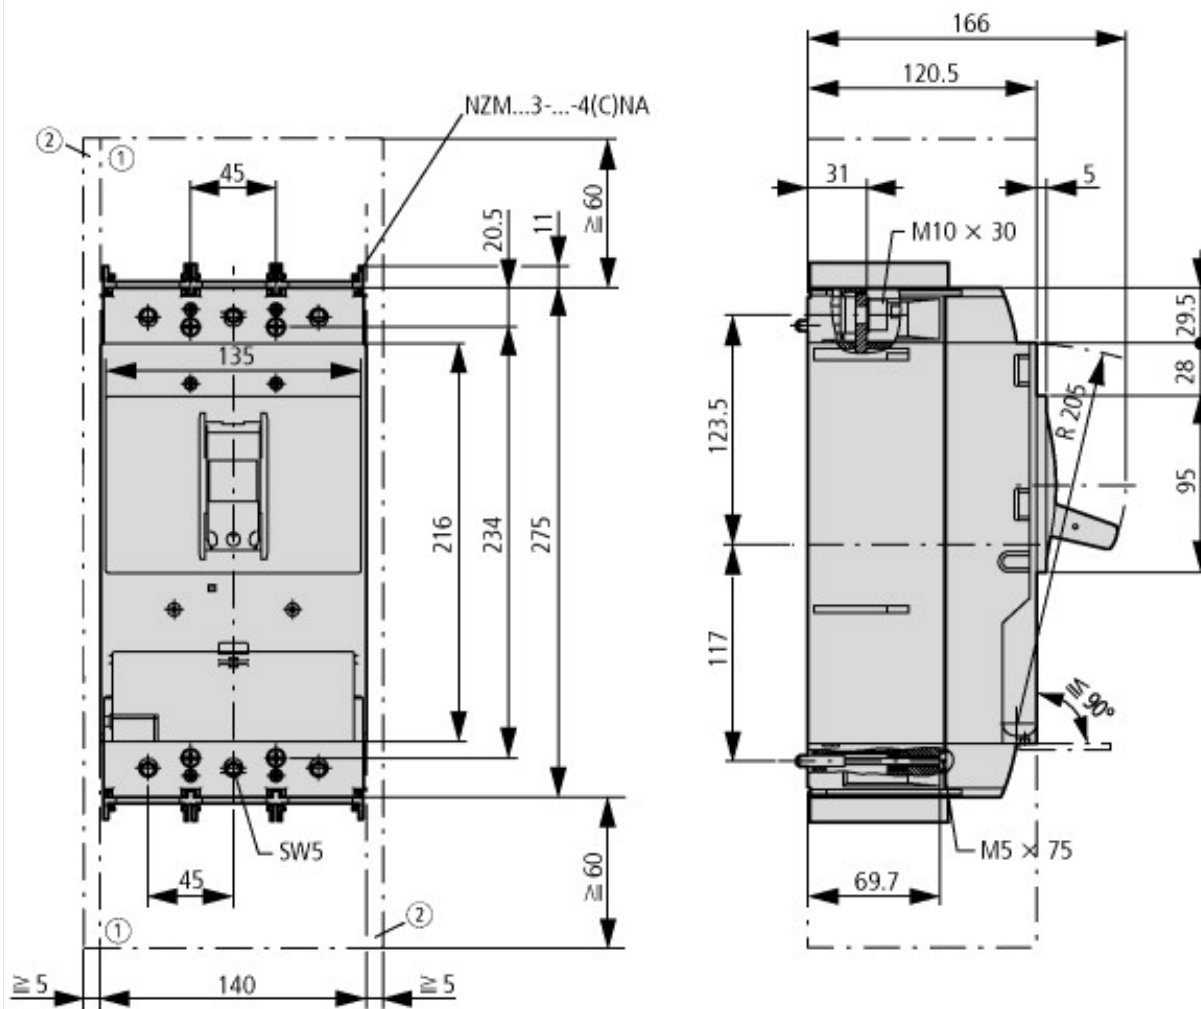

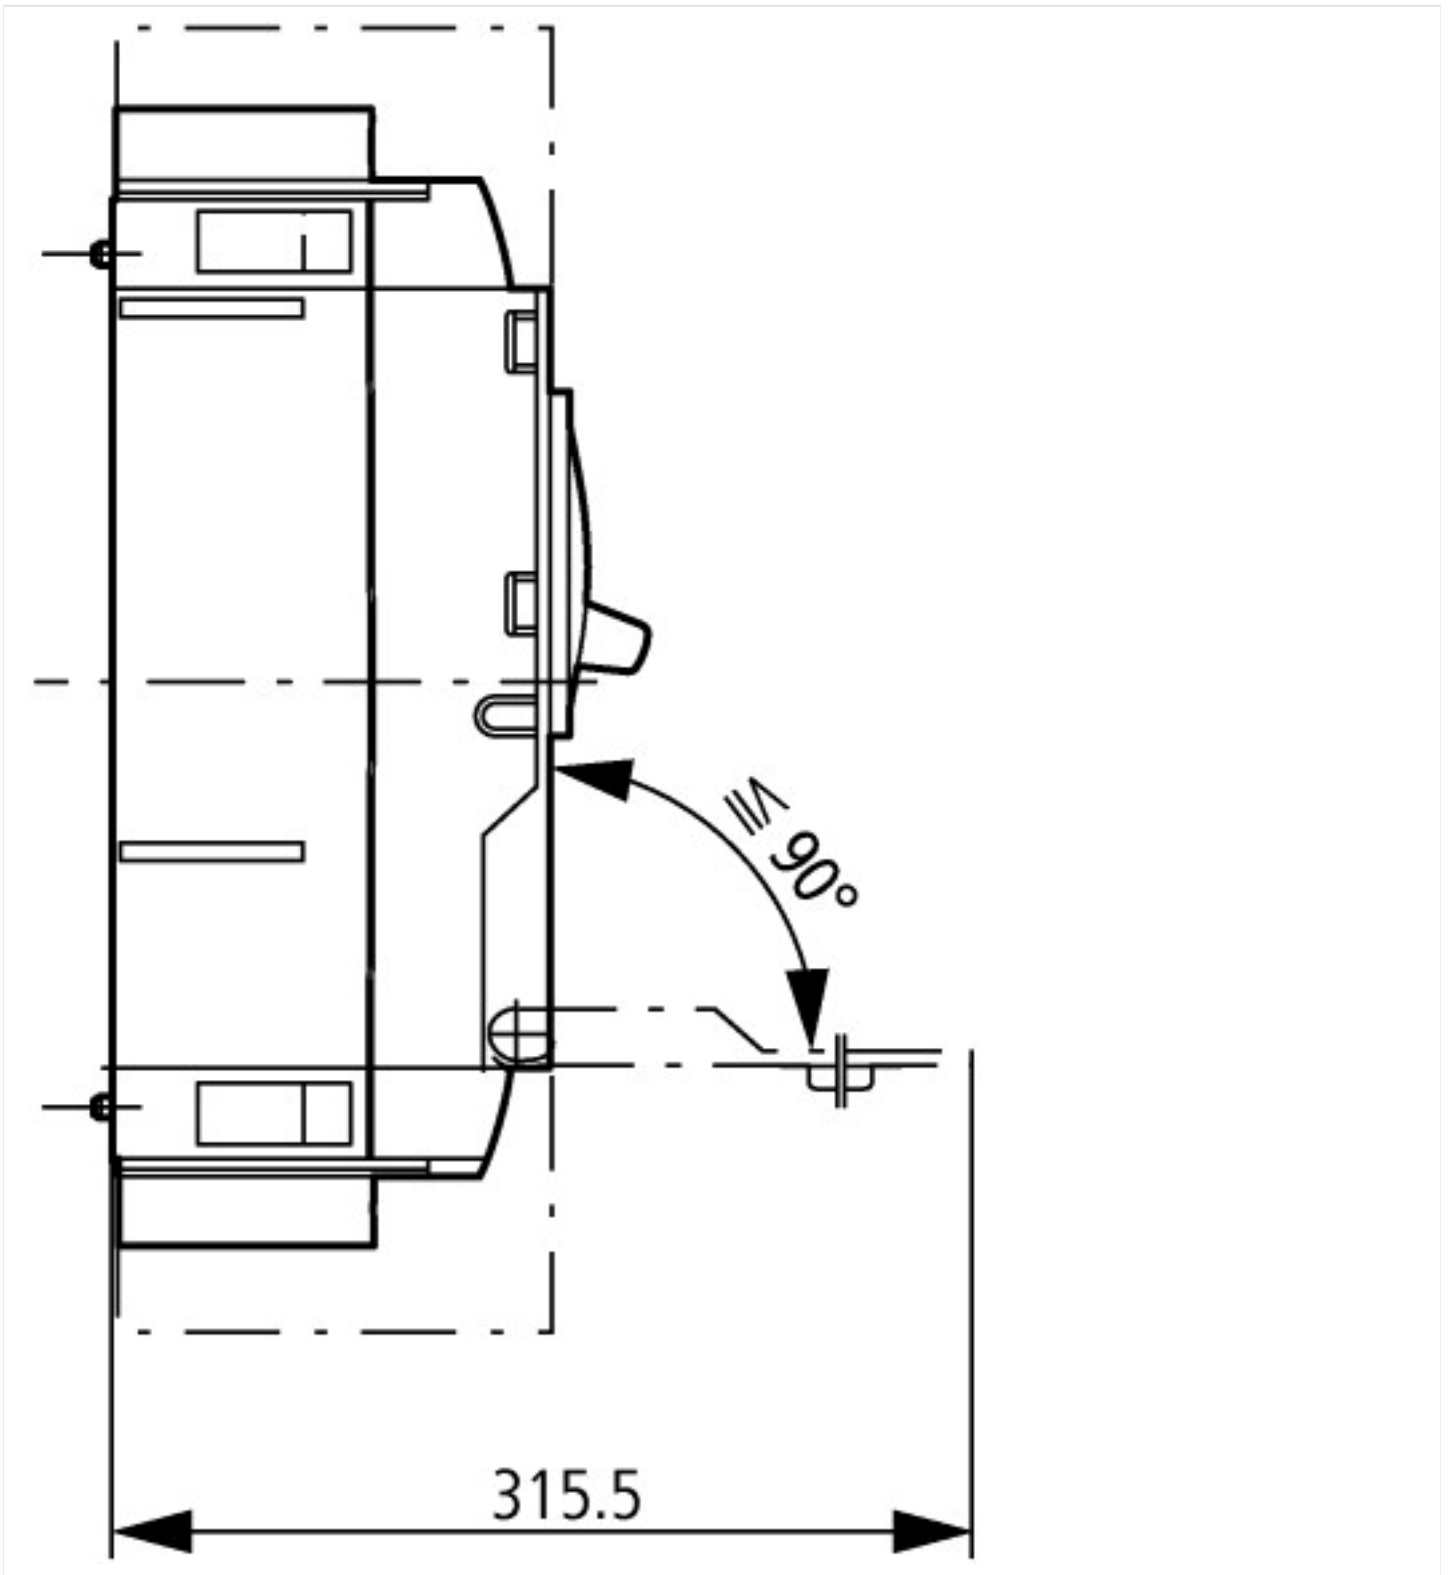- ① Blow out area, minimum clearance to adjacent parts
- ② Minimum clearance to adjacent parts



### Additional product information (links)

|                                     |   |
|-------------------------------------|---|
| Temperature dependency, Derating    | <a href="http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172">http://ecat.moeller.net/flip-cat/?edition=HPLEN&amp;startpage=17.172</a>   |
| CurveSelect characteristics program | <a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/CharacteristicsProgram/index.htm</a>         |
| Eaton configurator                  | <a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/ConfiguratorCircuitBreaker/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/ConfiguratorCircuitBreaker/index.htm</a> |