



**Motor-protective circuit-breaker, 3p, Ir=0.63-1A, screw connection**

**Part no.** PKZM0-1  
**Catalog No.** 072734  
**Eaton Catalog No.** XTPR001BC1NL  
**EL-Nummer (Norway)** 4355125


**Delivery program**

|  |   |          |   |  |
|--|---|----------|---|--|
| Product range  |   |          |   | PKZM0 motor protective circuit-breakers up to 32 A   |
| Basic function   |   |          |   | Motor protection   |
|  |   |          |   |  |
| Notes  |   |          |   | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection technique   |   |          |   | Screw terminals  |
| Contact sequence   |   |          |   |  |
| <b>Max. motor rating</b>   |   |          |   |  |
| AC-3   |   |          |   |  |
| 220 V 230 V 240 V  | P | kW       |   | 0.12   |
| 380 V 400 V 415 V  | P | kW       |   | 0.25   |
| 440 V  | P | kW       |   | 0.25   |
| 500 V  | P | kW       |   | 0.37   |
| 660 V 690 V  | P | kW       |   | 0.55   |
| <b>Setting range</b>   |   |          |   |  |
| Overload releases  |   | $I_r$    | A | 0.63 - 1   |
| short-circuit release  |   |          |   |  |
| max.   |   | $I_{rm}$ | A | 15.5   |
| <b>Notes</b><br>Phase failure sensitivity to IEC/EN 60947-4-1, VDE 0660 part 102.<br>can be snapped-on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height |   |          |   |  |
| <p>PTB 10 ATEX 3013, observe Manual MN03402003Z-DE/EN</p>  |   |          |   |  |

**Technical data**

**General**


|                     |  |    |  |  |
|---------------------|--|----|--|--|
| Standards           |  |    |  | IEC/EN 60947, VDE 0660   |
| Climatic proofing   |  |    |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature |  |    |  |  |
| Storage             |  | °C |  | - 40 - 80  |
| Open                |  | °C |  | -25 - +55  |
| Enclosed            |  | °C |  | - 25 - 40  |

|   |  |                 |   |
|---|--|-----------------|---|
| Mounting position   |  |                 |  |
| Direction of incoming supply  |  |                 | as required   |
| Degree of protection  |  |                 |   |
| Device  |  |                 | IP20  |
| Terminations  |  |                 | IP00  |
| Protection against direct contact   |  |                 | Finger and back-of-hand proof   |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 |  | g               | 25  |
| Altitude  |  | m               | 2000  |
| Terminal capacity main cable  |  |                 |   |
| Screw terminals   |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)  |
| Flexible with ferrule to DIN 46228  |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)  |
| Solid or stranded   |  | AWG             | 18 - 10   |
| Stripping length  |  | mm              | 10  |
| Specified tightening torque for terminal screws                           |  |                 |   |
| Main cable  |  | Nm              | 1.7   |
| Control circuit cables  |  | Nm              | 1   |

### Main conducting paths

|   |             |               |  |
|---|-------------|---------------|--|
| Rated impulse withstand voltage                         | $U_{imp}$   | V AC          | 6000   |
| Overvoltage category/pollution degree                   |             |               | III/3  |
| Rated operational voltage                               | $U_e$       | V AC          | 690  |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A             | 32 or current setting of the overcurrent release |
| Rated frequency   | f           | Hz            | 40 - 60  |
| Current heat loss (3 pole at operating temperature)     |             | W             | 5.33   |
| Lifespan, mechanical                                    | Operations  | $\times 10^6$ | 0.1  |
| Lifespan, electrical (AC-3 at 400 V)                    | Operations  | $\times 10^6$ | 0.1  |
| Maximum operating frequency                             |             | Ops./h        |  |
| Max. operating frequency                                |             | Ops/h         | 40   |
| Short-circuit rating                                    |             |               |  |
| DC  |             |               |  |
| Short-circuit rating                                    |             | kA            | 60   |
| Notes   |             |               | up to 250 V                                      |
| Motor switching capacity                                |             |               |  |
| AC-3 (up to 690 V)                                      |             | A             | 32   |
| DC-5 (up to 250 V)                                      |             | A             | 25 (3 contacts in series)                        |

### Trip blocks

|   |  |              |  |
|---|--|--------------|--|
| Temperature compensation                                |  |              |  |
| to IEC/EN 60947, VDE 0660                               |  | °C           | - 5 ... 40   |
| Operating range   |  | °C           | - 25 ... 55  |
| Temperature compensation residual error for $T > 40$ °C |  |              |  0.25 %/K |
| Setting range of overload releases                      |  | $\times I_u$ | 0.6 - 1  |
| short-circuit release                                   |  |              | Basic device, fixed: $15.5 \times I_u$   |
| Short-circuit release tolerance                         |  |              | $\pm 20\%$   |
| Phase-failure sensitivity                               |  |              | IEC/EN 60947-1-1, VDE 0660 Part 102  |

### Design verification as per IEC/EN 61439

|  |           |   |      |
|--|-----------|---|------|
| Technical data for design verification                   |           |   |      |
| Rated operational current for specified heat dissipation | $I_n$     | A | 1    |
| Heat dissipation per pole, current-dependent             | $P_{vid}$ | W | 0    |
| Equipment heat dissipation, current-dependent            | $P_{vid}$ | W | 5.33 |

|  |                   |    |  |
|--|-------------------|----|--|
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 0  |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | -25  |
| Operating ambient temperature max.   |                   | °C | 55   |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                   |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                   |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                   |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                   |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                   |    |  |
| 10.9.2 Power-frequency electric strength   |                   |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                   |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                   |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 6.0


|  |  |    |  |
|--|--|----|--|
| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)   |  |    |  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss8.1-27-37-04-01 [AGZ529013]) |  |    |  |
| Overload release current setting   |  | A  | 0.63 - 1                                 |
| Adjustment range undelayed short-circuit release   |  | A  | 15.5 - 15.5                              |
| Thermal protection   |  |    | No                                       |
| Phase failure sensitive  |  |    | Yes                                      |
| Switch off technique   |  |    | Thermomagnetic                           |
| Rated operating voltage  |  | V  | 690 - 690                                |
| Rated permanent current I <sub>u</sub>   |  | A  | 1  |
| Rated operation power at AC-3, 230 V   |  | kW | 0.12                                     |
| Rated operation power at AC-3, 400 V   |  | kW | 0.25                                     |
| Type of electrical connection of main circuit  |  |    | Screw connection                         |
| Type of control element  |  |    | Turn button                              |
| Device construction  |  |    | Built-in device fixed built-in technique |
| With integrated auxiliary switch   |  |    | No                                       |
| With integrated under voltage release  |  |    | No                                       |
| Number of poles  |  |    | 3  |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, AC   |  | kA | 150                                      |
| Degree of protection (IP)  |  |    | IP20                                     |
| Height   |  | mm | 93                                       |
| Width  |  | mm | 45                                       |

## Approvals


|                                      |  |
|--------------------------------------|--|
| Product Standards                    | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking                 |
| UL File No.                          | E36332   |
| UL Category Control No.              | NLRV   |
| CSA File No.                         | 165628   |
| CSA Class No.                        | 3211-05  |
| North America Certification          | UL listed, CSA certified   |
| Specially designed for North America | No   |
| Suitable for                         | Branch circuit: Manual type E if used with terminal, or suitable for group installations |

## Characteristics

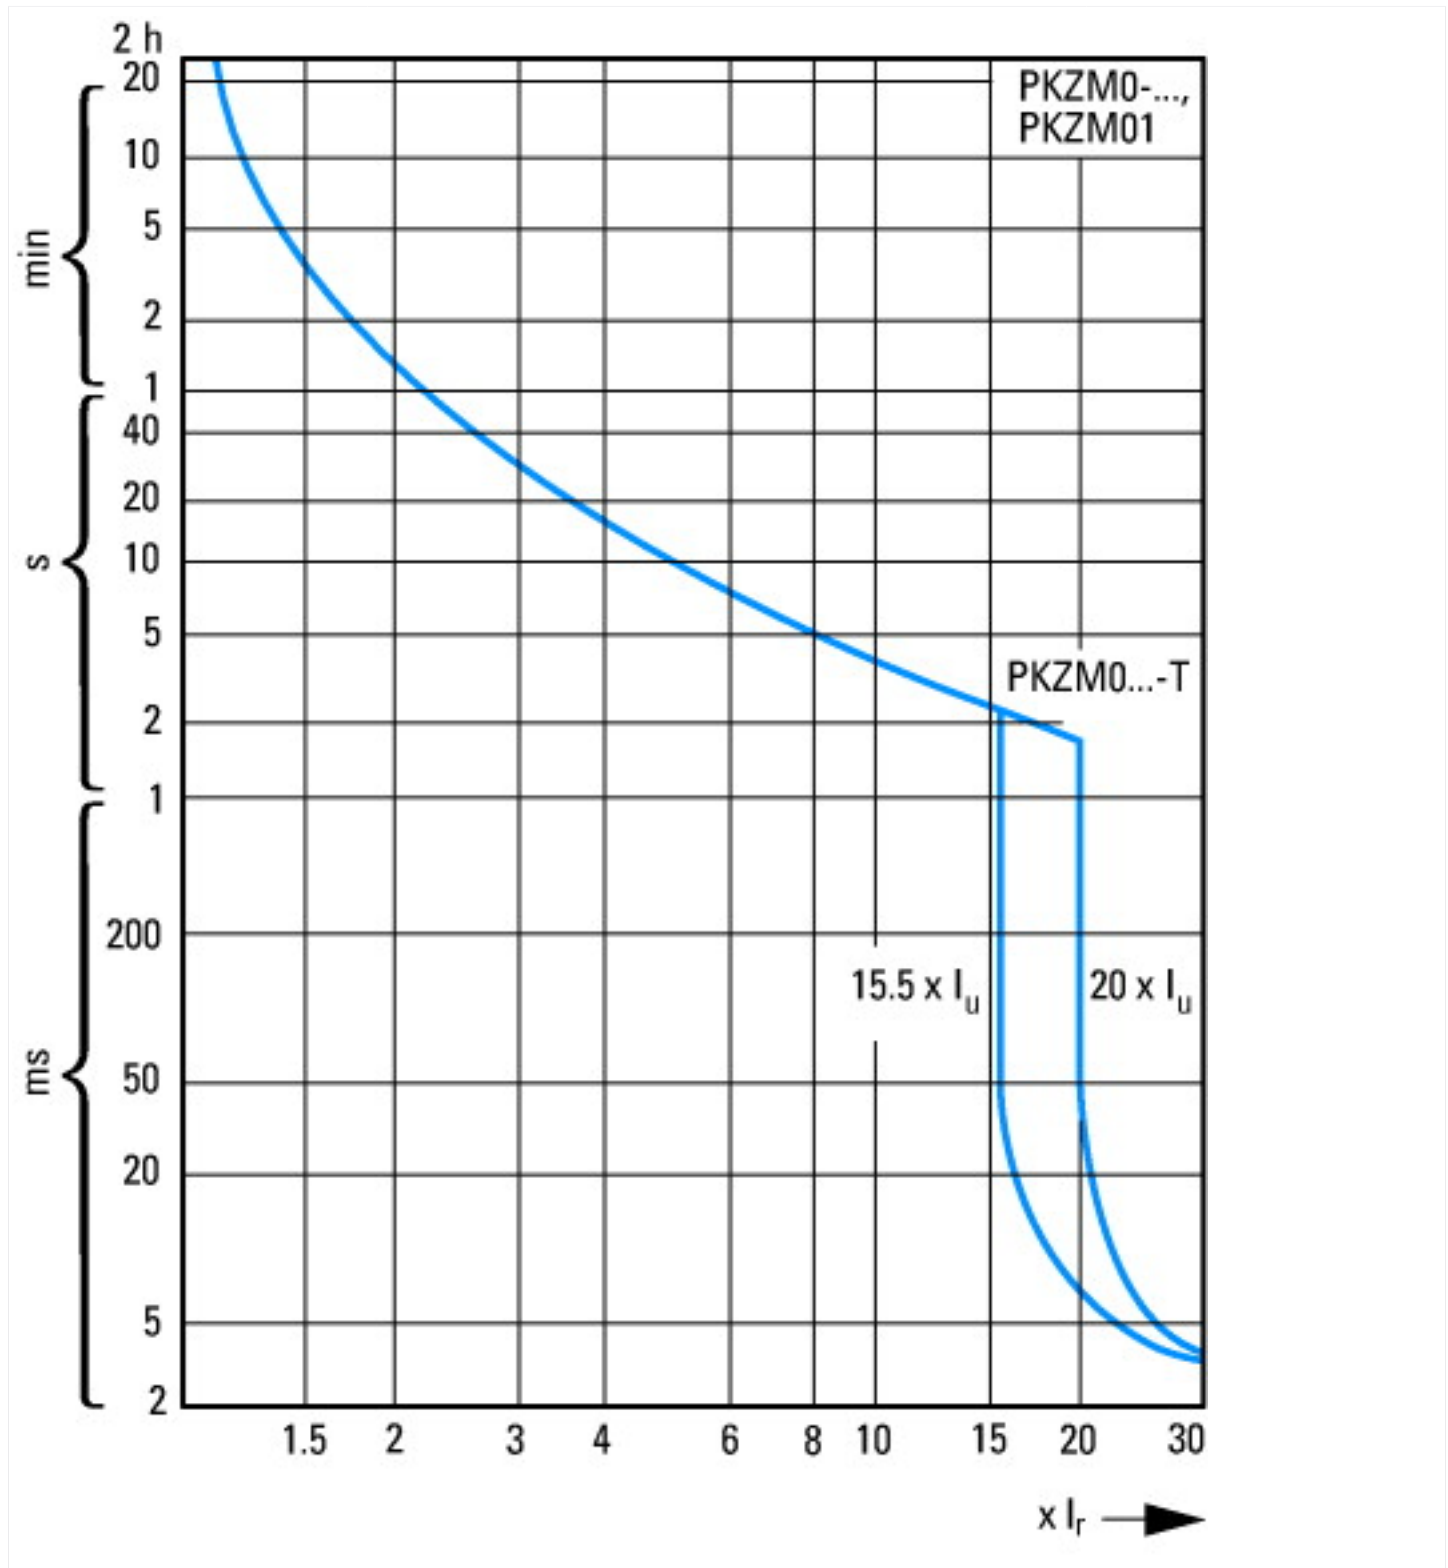

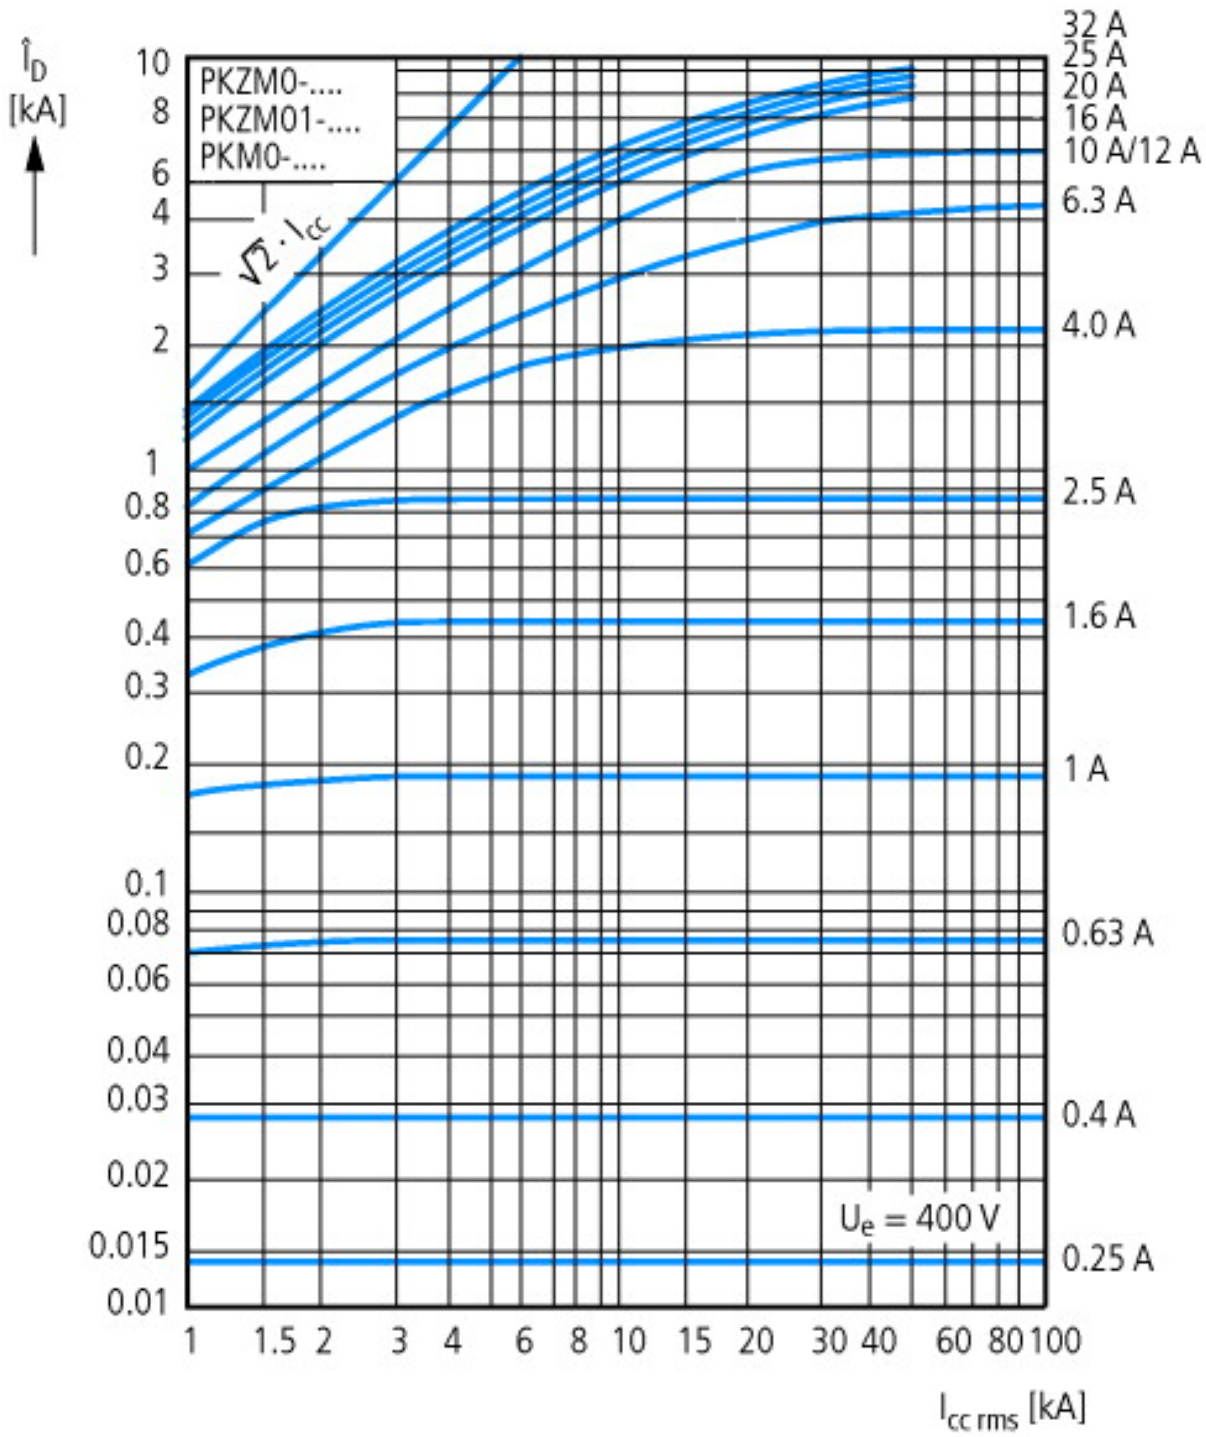


Let-through current

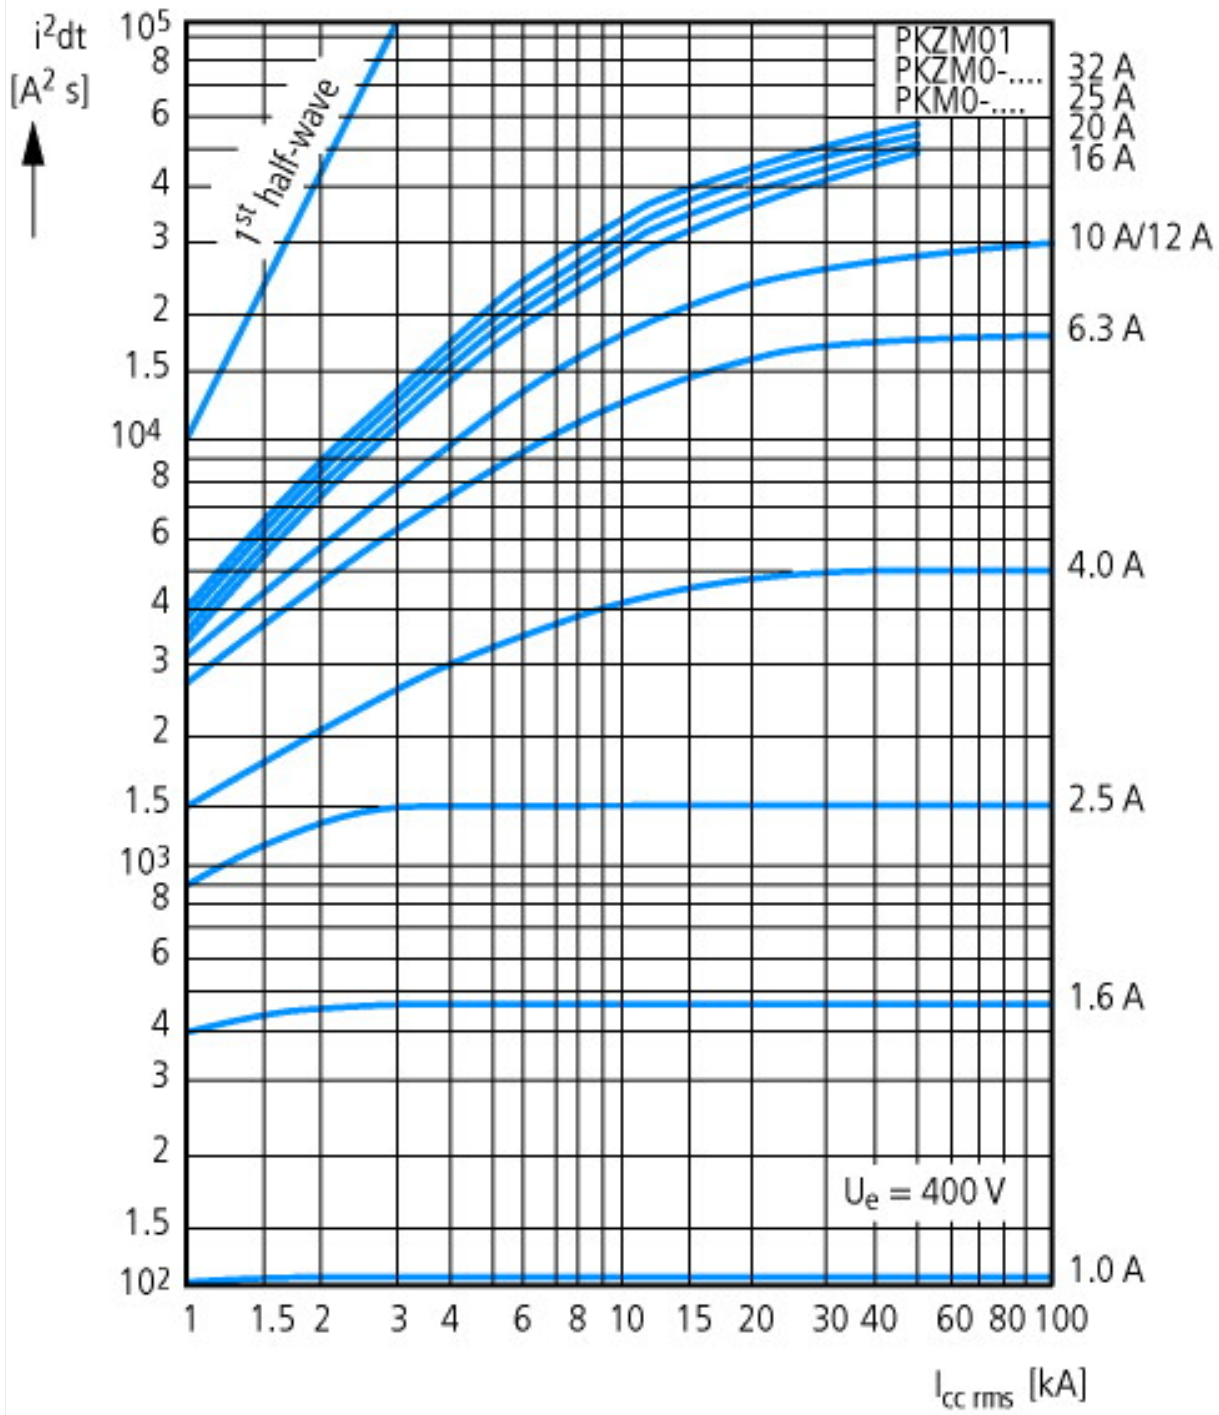


Let-through energy

## Dimensions

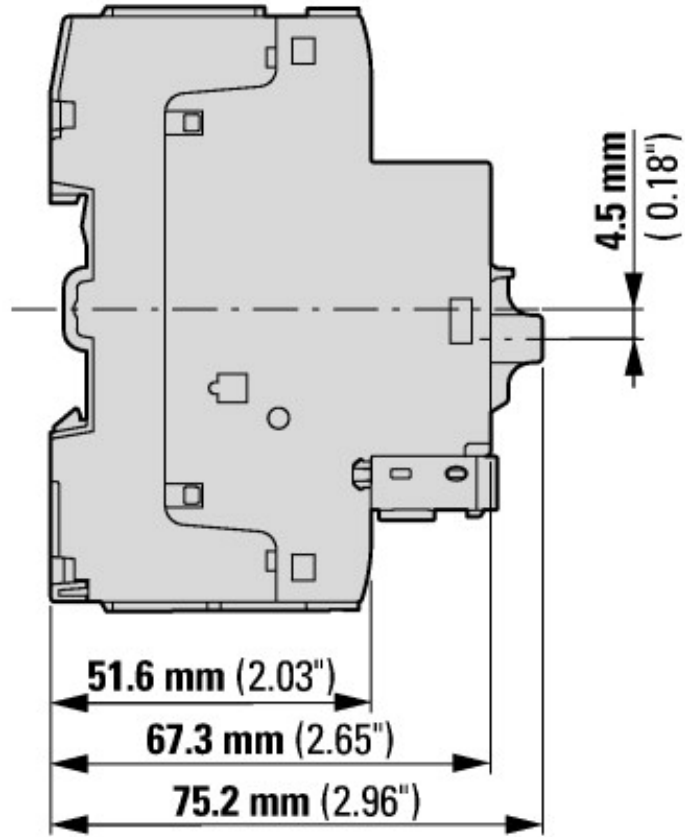

Motor-protective circuit-breaker with standard auxiliary contact  
 PKZM0-...(+NHI-E-...-PKZ0)  
 PKZM0-...-T(+NHI-E-...-PKZ0)  
 PKM0-...(+NHI-E-...-PKZ0)

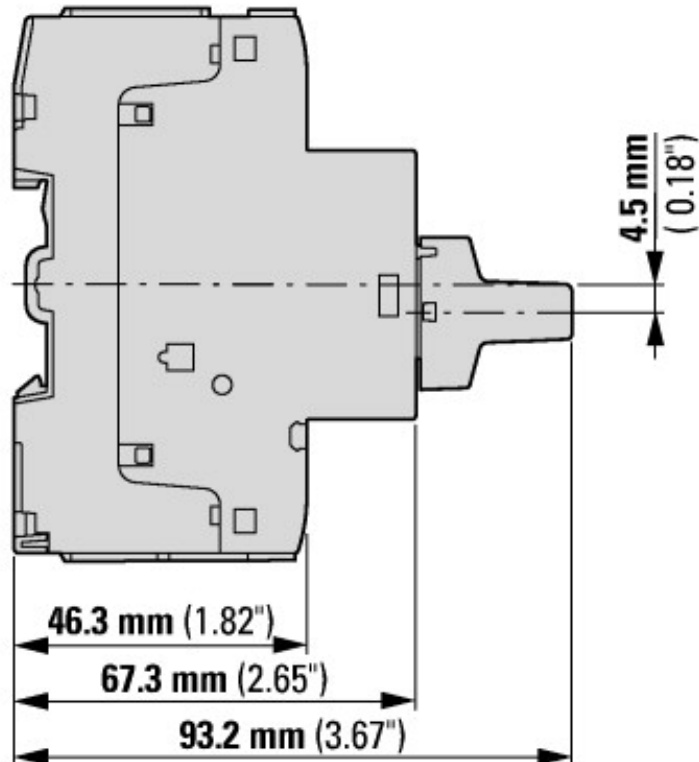

Motor-protective circuit-breakers with lockable rotary handles  
 PKZM0-...+AK-PKZ0



Motor-protective circuit-breakers with early-make auxiliary contacts  
PKZM0-...+VHI-...-PKZ0

## Additional product information (links)

### IL03407010Z (AWA1210-2138) Motor-protective circuit-breaker

IL03407010Z (AWA1210-2138) Motor-protective circuit-breaker [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407010Z2017\\_07.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407010Z2017_07.pdf)

### IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker

IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407011Z2017\\_07.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407011Z2017_07.pdf)

### MN03402003Z (AWB1210-1458) PKZM0 motor-protective circuit-breakers, overload monitoring of Ex e motors

MN03402003Z (AWB1210-1458) PKZM0 motor-protective circuit-breakers, overload monitoring of Ex e motors - Deutsch / English [ftp://ftp.moeller.net/DOCUMENTATION/AWB\\_MANUALS/MN03402003Z\\_DE\\_EN.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN03402003Z_DE_EN.pdf)

EC prototype test certification PTB (German National Institute of Natural and Engineering Sciences) 10 ATEX 3013 [http://intranet.moeller.net/technik\\_daten/file/produkt\\_deklarationen/file/approbationen/00001731.pdf](http://intranet.moeller.net/technik_daten/file/produkt_deklarationen/file/approbationen/00001731.pdf)

Motor starters and "Special Purpose Ratings" for the North American market [http://www.moeller.net/binary/ver\\_techpapers/ver953en.pdf](http://www.moeller.net/binary/ver_techpapers/ver953en.pdf)

Busbar Component Adapters for modern Industrial control panels [http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)