



MASTER LEDtube EM/Mains T8

MAS LEDtube 1500mm UO 24W 830 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

Product data

General Information		Lamp Current (Min)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		103 mA
Nominal Lifetime (Nom)	50000 h	Starting Time (Nom)	0.5 s
Switching Cycle	200000X	Warm Up Time To 60% Light (Nom)	0.5 s
B50L70	50000 h	Power Factor (Nom)	0.9
		Voltage (Nom)	220-240 V
Light Technical		Temperature	
Color Code	830 [CCT of 3000K]	T-Ambient (Max)	45 °C
Luminous Flux (Nom)	3400 lm	T-Ambient (Min)	-20 °C
Luminous Flux (Rated) (Nom)	3400 lm	T-Storage (Max)	65 °C
Correlated Color Temperature (Nom)	3000 K	T-Storage (Min)	-40 °C
Color Consistency	<6	T-Case Maximum (Nom)	60 °C
Color Rendering Index (Nom)	83		
LLMF At End Of Nominal Lifetime (Nom)	70 %	Controls and Dimming	
		Dimmable	No
Operating and Electrical		Mechanical and Housing	
Input Frequency	50 to 60 Hz	Product Length	1500 mm
Power (Rated) (Nom)	24 W		
Lamp Current (Max)	112 mA		

MASTER LEDtube EM/Mains T8

Approval and Application

Energy Saving Product	Yes
Energy Efficiency Label (EEL)	A++
Approval Marks	TUV CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	24 kWh

Product Data


Full product code	871869668742000
-------------------	-----------------

Order product name	MAS LEDtube 1500mm UO 24W 830 T8
EAN/UPC - Product	8718696687420
Order code	929001298102
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001298102
Net Weight (Piece)	0.450 kg

Warnings and Safety

- NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.



Dimensional drawing

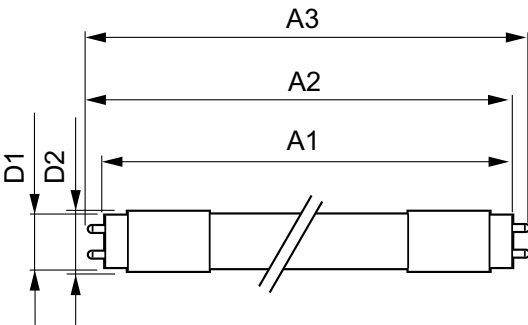

TLED 4ft 24W-58W 3400lm 160D 3000K G13ND

Product	D1	D2	A1	A2	A3
MAS LEDtube 1500mm UO 24W 830 T8	25.78 mm	28 mm	1498.7 mm	1505.8 mm	1512.9 mm

Photometric data

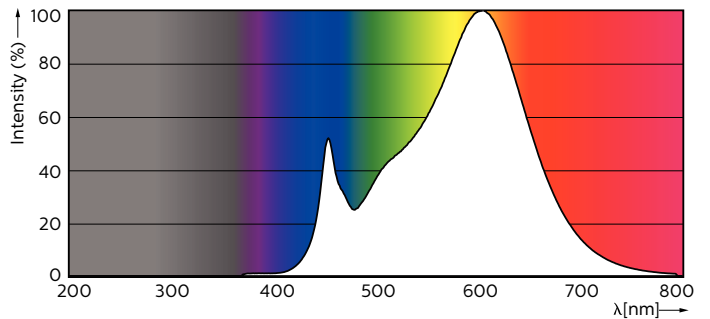

MASTER LEDtube EM/Mains T8

