

# MASTER LEDtube EM/Mains T8

## MAS LEDtube 1200mm HO 14W830 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

### **Product data**

| General Information                   |                                       |  |  |  |  |
|---------------------------------------|---------------------------------------|--|--|--|--|
| Cap-Base                              | G13 [ Medium Bi-Pin Fluorescent]      |  |  |  |  |
| Nominal Lifetime (Nom)                | 50000 h                               |  |  |  |  |
| Switching Cycle                       | 200000X                               |  |  |  |  |
| B50L70                                | 50000 h                               |  |  |  |  |
| Light Technical                       |                                       |  |  |  |  |
| Color Code                            | 830 [ CCT of 3000K]                   |  |  |  |  |
| Luminous Flux (Nom)                   | 2000 lm                               |  |  |  |  |
| Luminous Flux (Rated) (Nom)           | 2000 lm                               |  |  |  |  |
| Correlated Color Temperature (Nom)    | 3000 K                                |  |  |  |  |
| Color Consistency                     | <6                                    |  |  |  |  |
| Color Rendering Index (Nom)           | 83                                    |  |  |  |  |
| LLMF At End Of Nominal Lifetime (Nom) | 70 %                                  |  |  |  |  |
| Operating and Electrical              |                                       |  |  |  |  |
| Input Frequency                       | 50 to 60 Hz                           |  |  |  |  |
| Power (Rated) (Nom)                   | 14 W                                  |  |  |  |  |
| Lamp Current (Max)                    | 65 mA                                 |  |  |  |  |
|                                       | · · · · · · · · · · · · · · · · · · · |  |  |  |  |

| Lamp Current (Min)              | 60 mA     |  |  |
|---------------------------------|-----------|--|--|
| Starting Time (Nom)             | 0.5 s     |  |  |
| Warm Up Time To 60% Light (Nom) | 0.5 s     |  |  |
| Power Factor (Nom)              | 0.9       |  |  |
| Voltage (Nom)                   | 220-240 V |  |  |
|                                 |           |  |  |
| Temperature                     |           |  |  |
| T-Ambient (Max)                 | 45 °C     |  |  |
| T-Ambient (Min)                 | -20 °C    |  |  |
| T-Storage (Max)                 | 65 °C     |  |  |
| T-Storage (Min)                 | -40 °C    |  |  |
| T-Case Maximum (Nom)            | 55 °C     |  |  |
|                                 |           |  |  |
| Controls and Dimming            |           |  |  |
| Dimmable                        | No        |  |  |
|                                 |           |  |  |
| Mechanical and Housing          |           |  |  |
| Product Length                  | 1200 mm   |  |  |
|                                 |           |  |  |

Datasheet, 2017, May 26 data subject to change

# MASTER LEDtube EM/Mains T8

| Approval and Application      |  |
|-------------------------------|--|
| Energy Saving Product         | Yes  |
| Energy Efficiency Label (EEL) | A++  |
| Approval Marks                | CE marking RoHS compliance KEMA Keur certificate |
| Energy Consumption kWh/1000 h | 14 kWh   |
| Product Data                  |  |
| Full product code             | 871869668718500                                  |

MAS LEDtube 1200mm HO 14W830 T8


| EAN/UPC - Product               | 8718696687185 |  |  |  |
|---------------------------------|---------------|--|--|--|
| Order code                      | 929001298902  |  |  |  |
| Numerator - Quantity Per Pack   | 1             |  |  |  |
| Numerator - Packs per outer box | 10            |  |  |  |
| Material Nr. (12NC)             | 929001298902  |  |  |  |
| Net Weight (Piece)              | 0.270 kg      |  |  |  |
|                                 |               |  |  |  |

## Warnings and Safety

Order product name


• NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.


# Dimensional drawing



| Product                      | D1       | D2    | A1        | A2        | A3        |
|------------------------------|----------|-------|-----------|-----------|-----------|
| MAS LEDtube 1200mm HO 14W830 | 25.78 mm | 28 mm | 1198.2 mm | 1205.3 mm | 1212.4 mm |
| Т8                           |          |       |           |           |           |

## Photometric data



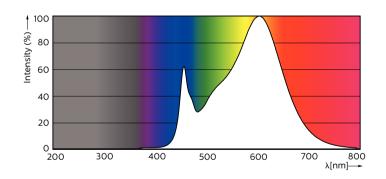

# MASTER LEDtube EM/Mains T8

