

CorePro LEDlinear MV

CorePro LEDlinear ND 7.5-60W R7S 78mm840


CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light just like a halogen lamp. The deep dimming function enables a cozy ambience when using a dimmable fixture.

Product data

General Information		Warm Up Time To 60% Light (Nom)	
Cap-Base	R7S [R7s]		0.5 s
Nominal Lifetime (Nom)	15000 h	Power Factor (Nom)	0.5
Switching Cycle	50000X	Voltage (Nom)	220-240 V
Technical Type	7.5-60W		
Light Technical		Temperature	
Color Code	840 [CCT of 4000K]	T-Case Maximum (Nom)	104 °C
Luminous Flux (Nom)	1000 lm		
Luminous Flux (Rated) (Nom)	1000 lm	Controls and Dimming	
Color Designation	Cool White (CW)	Dimmable	No
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	133.33 lm/W	Approval and Application	
Color Consistency	<6	Energy Efficiency Label (EEL)	A++
Color Rendering Index (Nom)	80	Energy Consumption kWh/1000 h	8 kWh
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Product Data	
Input Frequency	50 to 60 Hz	Full product code	871869671396900
Power (Rated) (Nom)	7.5 W	Order product name	CorePro LEDlinear ND 7.5-60W R7S 78mm840
Lamp Current (Nom)	70 mA	EAN/UPC - Product	8718696713969
Wattage Equivalent	60 W	Order code	929001339102
Starting Time (Nom)	0.5 s	Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	10
		Material Nr. (12NC)	929001339102
		Net Weight (Piece)	0.045 kg

CorePro LEDlinear MV


Dimensional drawing

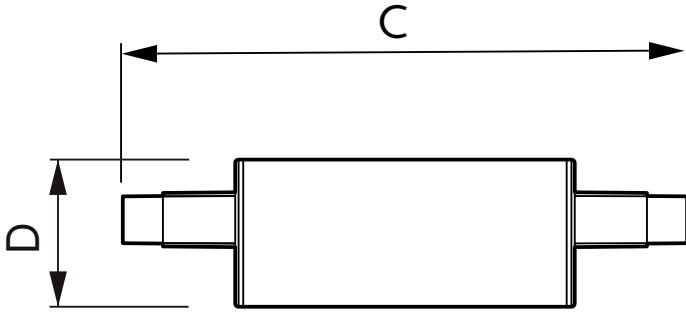


Product	D	C
CorePro LEDlinear ND 7.5-60W R7S 78mm840	29 mm	78 mm

Linear 220V 8-60W 806lm 4000K R7S ND


Photometric data



© 2017 Philips Lighting B.V. All rights reserved. Page 10/17

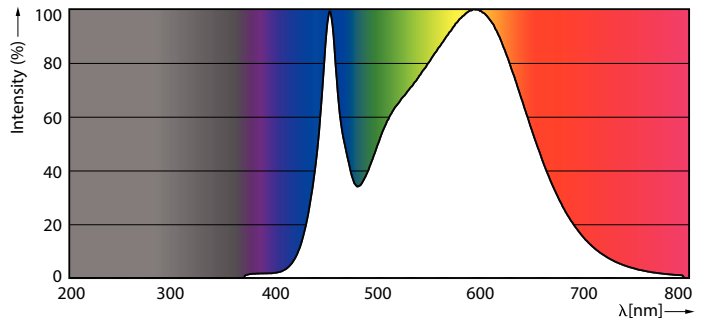

CorePro LEDlinear MV 60W R7S 840 Linear



CorePro LEDlinear MV 60W R7S 840 Linear

CorePro LEDlinear MV

Lifetime



LEDbulb 60W E14 827 FR B38

LEDbulb 60W E14 827 FR B38

