



MASTER LEDbulbs

MAS LED bulb DT 9-60W E27 927-922 A60 FR

The MASTER LEDbulb range delivers a dimmable glow effect for a welcoming, warm atmosphere, making it ideal for general lighting applications in the hospitality industry. Its unique design radiates warm light in all directions, making it a true alternative to incandescent lamps. They are particularly suitable for public areas such as lobbies, corridors, stairwells, where the light is always on. Compatible with existing fixtures with an E27 holder and designed for retrofit replacement of incandescent bulbs, MASTER LEDbulb delivers huge energy savings and minimizes maintenance cost without any compromise on light quality. They can be used together with most leading-edge dimmers, enabling further efficiencies while helping to create the desired atmosphere.

Product data

| General Information | |
|------------------------------------|-------------------------------|
| Cap-Base | E27 [E27] |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 100000X |
| Technical Type | 9-60W |
| | |
| Light Technical | |
| Color Code | 922-927 [CCT of 2200K-2700K] |
| Beam Angle (Nom) | 200 ° |
| Luminous Flux (Nom) | 806 lm |
| Luminous Flux (Rated) (Nom) | 806 lm |
| Color Designation | Warm White (WW) |
| Correlated Color Temperature (Nom) | 2200-2700 K |
| Luminous Efficacy (rated) (Nom) | 89.56 lm/W |
| Color Consistency | <6 |
| Color Rendering Index (Nom) | 90 |
| | |

| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
|---------------------------------------|-------------|
| | |
| Operating and Electrical | |
| Input Frequency | 50 to 60 Hz |
| Power (Rated) (Nom) | 9 W |
| Lamp Current (Nom) | 46 mA |
| Wattage Equivalent | 60 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time To 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.7 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| T-Case Maximum (Nom) | 80 °C |

Datasheet, 2017, July 12 data subject to change

MASTER LEDbulbs


| Controls and Dimming | |
|-------------------------------|-----------------|
| Dimmable | Yes |
| | |
| Mechanical and Housing | |
| Bulb Finish | Frosted |
| | |
| Approval and Application | |
| Energy Efficiency Label (EEL) | A+ |
| Energy Consumption kWh/1000 h | 9 kWh |
| | |
| Product Data | |
| Full product code | 871869670711100 |

| Order product name | MAS LED bulb DT 9-60W E27 927-922 A60 FR |
|---------------------------------|--|
| EAN/UPC - Product | 8718696707111 |
| Order code | 929001351402 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929001351402 |
| Net Weight (Piece) | 0.060 kg |
| | |


Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


Dimensional drawing




A60S+ 230V9-60W806lm2.2-2.7KK E27D CRI90



Photometric data



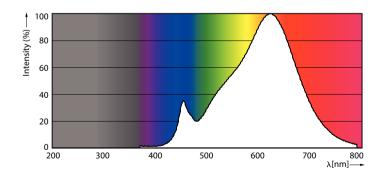

MASTER LEDbulb 40W E27 922-927 FR A60

MASTER LEDbulbs

