



CorePro LEDlinear MV

CorePro LED linear D 14-120W R7S 118 830


CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light just like a halogen lamp. The deep dimming function enables a cozy ambience when using a dimmable fixture.

Product data

General Information		Warm Up Time To 60% Light (Nom)	
Cap-Base	R7S [R7s]	Power Factor (Nom)	0.8
Nominal Lifetime (Nom)	15000 h	Voltage (Nom)	220-240 V
Switching Cycle	50000X	Temperature	
Technical Type	14-120W	T-Case Maximum (Nom)	100 °C
Light Technical		Controls and Dimming	
Color Code	830 [CCT of 3000K]	Dimmable	Yes
Luminous Flux (Nom)	2000 lm	Approval and Application	
Luminous Flux (Rated) (Nom)	2000 lm	Energy Efficiency Label (EEL)	A++
Color Designation	White (WH)	Energy Consumption kWh/1000 h	14 kWh
Correlated Color Temperature (Nom)	3000 K	Product Data	
Luminous Efficacy (rated) (Nom)	142.86 lm/W	Full product code	871869671400300
Color Consistency	<6	Order product name	CorePro LED linear D 14-120W R7S 118 830
Color Rendering Index (Nom)	80	EAN/UPC - Product	8718696714003
LLMF At End Of Nominal Lifetime (Nom)	70 %	Order code	929001353602
Operating and Electrical		Numerator - Quantity Per Pack	1
Input Frequency	50 to 60 Hz	Numerator - Packs per outer box	10
Power (Rated) (Nom)	14 W	Material Nr. (12NC)	929001353602
Lamp Current (Nom)	75 mA	Net Weight (Piece)	0.095 kg
Wattage Equivalent	120 W		
Starting Time (Nom)	0.5 s		

CorePro LEDlinear MV


Dimensional drawing

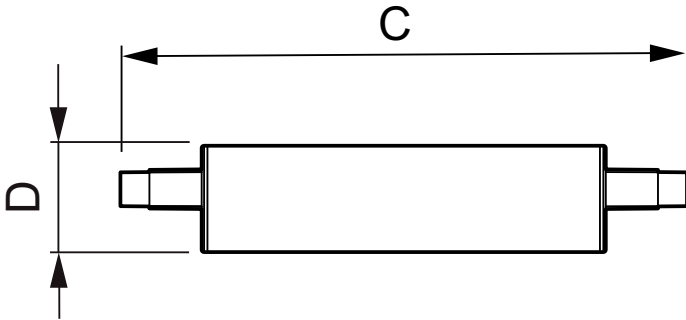


R7S 220V 15.5W-110W 1800lm 3000K R7S D

Product	D	C
CorePro LED linear D 14-120W R7S 118 830	29 mm	118 mm


Photometric data



General photometric data

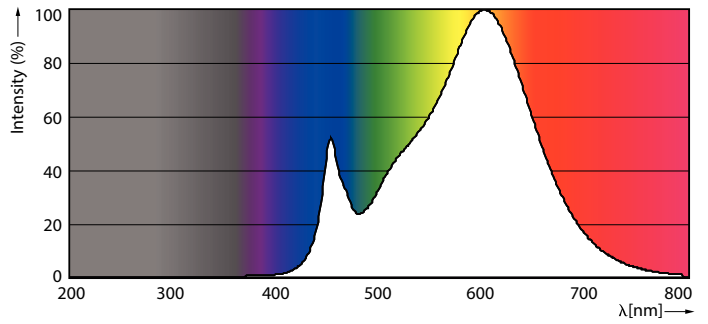

CorePro LEDlinearMV 14-120W R7S 830 D



CorePro LEDlinearMV 14-120W R7S 830 D

CorePro LEDlinear MV

Lifetime



LEDbulb 60W E14 827 FR B38

LEDbulb 60W E14 827 FR B38

