



CorePro LEDlinear MV


CorePro LED linear D 14-120W R7S 118 840

CorePro R7S is a retrofit replacement for traditional double-ended linear R7S lamps. Its 'light all around' design delivers light just like a halogen lamp. The deep dimming function enables a cozy ambience when using a dimmable fixture.

Product data

General Information		Warm Up Time To 60% Light (Nom)	
Cap-Base	R7S [R7s]		0.5 s
Nominal Lifetime (Nom)	15000 h	Power Factor (Nom)	0.8
Switching Cycle	50000X	Voltage (Nom)	220-240 V
Technical Type	14-120W	Temperature	
Light Technical		T-Case Maximum (Nom)	100 °C
Color Code	840 [CCT of 4000K]	Controls and Dimming	
Luminous Flux (Nom)	2000 lm	Dimmable	Yes
Luminous Flux (Rated) (Nom)	2000 lm	Approval and Application	
Color Designation	Cool White (CW)	Energy Efficiency Label (EEL)	A++
Correlated Color Temperature (Nom)	4000 K	Energy Consumption kWh/1000 h	14 kWh
Luminous Efficacy (rated) (Nom)	142.86 lm/W	Product Data	
Color Consistency	<6	Full product code	871869671406500
Color Rendering Index (Nom)	80	Order product name	CorePro LED linear D 14-120W R7S 118 840
LLMF At End Of Nominal Lifetime (Nom)	70 %	EAN/UPC - Product	8718696714065
Operating and Electrical		Order code	929001353702
Input Frequency	50 to 60 Hz	Numerator - Quantity Per Pack	1
Power (Rated) (Nom)	14 W	Numerator - Packs per outer box	10
Lamp Current (Nom)	75 mA	Material Nr. (12NC)	929001353702
Wattage Equivalent	120 W	Net Weight (Piece)	0.095 kg
Starting Time (Nom)	0.5 s		


Dimensional drawing

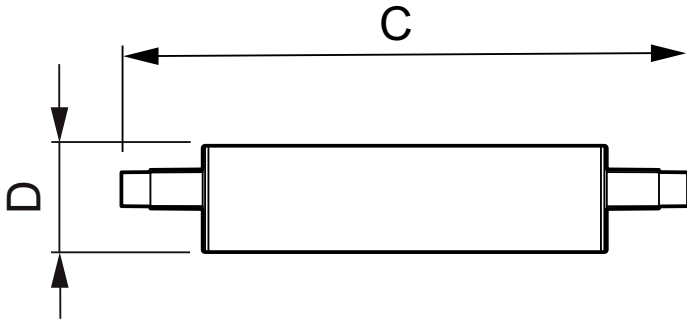


R7S 220V 15.5W-120W 2000lm 4000K R7S D

Product	D	C
CorePro LED linear D 14-120W R7S 118 840	29 mm	118 mm


Photometric data

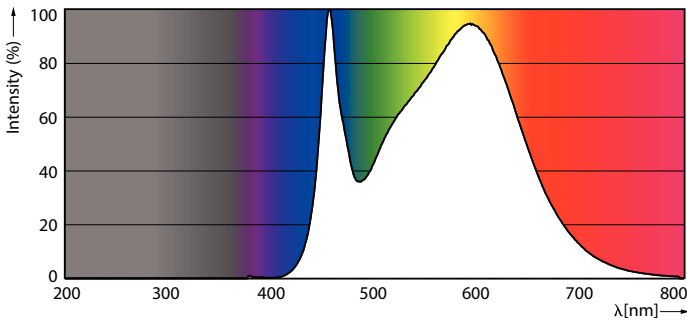

NAM Highbay 165W EX39 4000K 60-120D NB WB UDL



General Information Table



CorePro LEDlinearMV 14-120W R7S 830 D

CorePro LEDlinear MV

Lifetime



LEDbulb 60W E14 827 FR B38

LEDbulb 60W E14 827 FR B38

