

# 2.11 Indoor emergency lighting

Cronus8W

2



- Compliant to EN 60 598-2-22
- Certificated by ENEC Kema Keur
- IP rating IP40
- High temperature batteries Ni-Cd
- Autotest & models

### Light Source:

8W FL8W G5

Cronus 8W is a modern stylish emergency luminaire that utilises an 8 watt fluorescence lamp, able to provide suitable luminosity to several types of installations.

### Construction:


Base, mounting plate and cover, fire retardant ABS, lens optical grade acrylic

A discreet test button is built in to the luminaire giving the opportunity for a quick and easy functional test to be undertaken by anyone that needs to check the luminair's status.

A full range of accessories are available. These include a recessed base for wall or flush mounting and a plexiglass sign for installing the luminaire as an exit sign.

### Operation:

Maintained, Non-Maintained, Autotest, slave and CBS models available

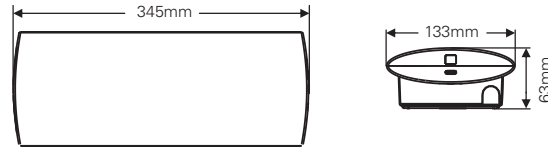

### Applications:

Residential applications, offices, hotels, restaurants and schools


Button for manual test



O-EL8RB



O-EL8PSLR

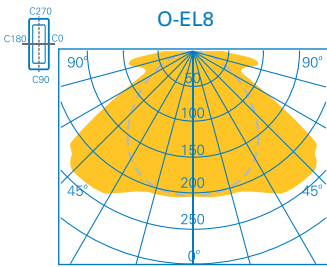

Model	Height (m)	Distance for 1 Lux				Distance for 0,5 Lux			
O-EL8									
	02,60	03,33	07,98	02,42	06,33	04,49	09,01	03,67	07,86
	02,80	03,34	08,30	02,43	06,44	04,65	09,54	03,72	08,03
	03,00	03,34	08,57	02,43	06,64	04,78	09,99	03,82	08,26
	03,20	03,37	08,81	02,41	06,70	04,90	10,24	03,85	08,49
	03,50	03,29	09,29	02,36	06,81	05,14	10,78	03,90	08,77
	04,00	03,04	09,43	02,13	06,95	05,22	11,82	03,98	09,20

Order code	Description					
O-EL8	Cronus 8W NM 90min	FL8WG5	100 Lm	90'	2,4V-1,5Ah NiCd	Non-Maintained
O-EL8-3H	Cronus 8W NM 180min	FL8WG5	115 Lm	180'	6V-1,5Ah NiCd	Non-Maintained
O-EL8C	Cronus 2x8W NM 90min	FL2x8WG5	250 Lm	90'	6V-1,5Ah NiCd	Non-Maintained
O-EL8M	Cronus 8W M 90min	FL8WG5	100 Lm	90'	2,4V-1,5Ah NiCd	Maintained
O-EL8M-3H	Cronus 8W M 180min	FL8WG5	115 Lm	180'	6V-1,5Ah NiCd	Maintained
O-EL8SU	Cronus 8W S 90min	FL8WG5	85 Lm	90'	2,4V-1,5Ah NiCd	Sustained
O-EL8SU-3H	Cronus 8W S 180min	FL8WG5	100 Lm	180'	6V-1,5Ah NiCd	Sustained
O-EL8-AUT	Cronus 8W NM Autotest 60min	FL8WG5	240 Lm	60'	6V-1,5Ah NiCd	Non-Maintained
O-EL8M-AUT	Cronus 8W M Autotest 60min	FL8WG5	240 Lm	60'	6V-1,5Ah NiCd	Maintained
O-EL8MAINS	Cronus 8W Mains	FL8W G5				Mains

### Accessories

O-EL8PSLR	Double side exit sign (Left/Right)
O-EL8PSD	Double side exit sign (Down)
O-EL8RB	Recessed base (both for wall or flush mounting)