



CorePro LEDspot MV

Corepro LEDspot CLA 3.5-35W GU10 840 36D

CorePro LEDspots are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots deliver significant energy savings and minimize maintenance cost.

Product data

General Information	
Cap-Base	GU10 [GU10]
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	3.5-35W
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	275 lm
Luminous Flux (Rated) (Nom)	275 lm
Luminous Intensity (Nom)	590 cd
Color Designation	Cool White (CW)
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	78.57 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux In 90° Cone (Rated)	275 lm

Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	3.5 W
Lamp Current (Nom)	32 mA
Wattage Equivalent	35 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.5
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	85 °C
Controls and Dimming	
Dimmable	No
Approval and Application	
Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A++
Energy Consumption kWh/1000 h	4 kWh


CorePro LEDspot MV

Product Data

Full product code	871869672835200
Order product name	Corepro LEDspot CLA 3.5-35W GU10 840 36D
EAN/UPC - Product	8718696728352
Order code	929001218002
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10
Material Nr. (12NC)	929001218002
Net Weight (Piece)	0.038 kg


Dimensional drawing

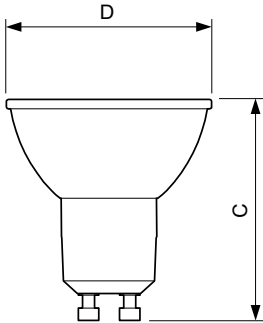


GU10 230V 4W-35W 260lm 60D 4000K GU10 ND

Product	D	C
Corepro LEDspot CLA 3.5-35W GU10 840 36D	50 mm	54 mm

Photometric data



Technical Information 1 Philips Lighting B.V. Page 107

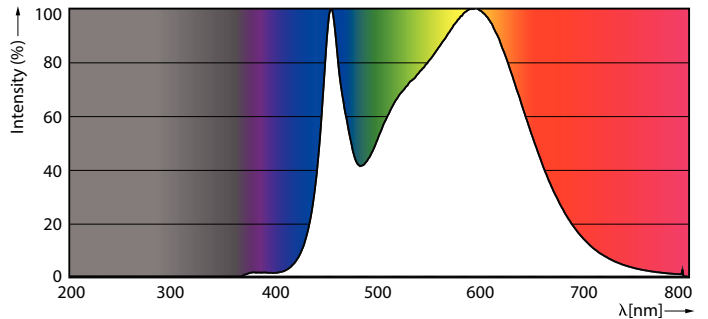

CorePro LEDspotMV 25W GU10 840 36D

