



MASTER VALUE LEDspot MV

MAS LED spot VLE D 4.9-50W GU10 927 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

Product data

| General Information | |
|------------------------------------|-----------------|
| Cap-Base | GU10 [GU10] |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 50000X |
| Technical Type | 4.9-50W |
| Light Technical | |
| Color Code | 927 |
| Beam Angle (Nom) | 36 ° |
| Luminous Flux (Nom) | 355 lm |
| Luminous Flux (Rated) (Nom) | 355 lm |
| Luminous Intensity (Nom) | 650 cd |
| Color Designation | Warm White (WW) |
| Rated Beam Angle | 36 ° |
| Correlated Color Temperature (Nom) | 2700 K |
| Luminous Efficacy (rated) (Nom) | 80.61 lm/W |

| Color Consistency | <6 |
|---------------------------------------|-------------|
| Color Rendering Index (Nom) | 90 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Luminous Flux In 90° Cone (Rated) | 355 lm |
| Operating and Electrical | |
| Input Frequency | 50 to 60 Hz |
| Power (Rated) (Nom) | 4.9 W |
| Lamp Current (Nom) | 27 mA |
| Wattage Equivalent | 50 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time To 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.8 |
| Voltage (Nom) | 220-240 V |

MASTER VALUE LEDspot MV

Temperature

| | |
|----------------------|-------|
| T-Case Maximum (Nom) | 80 °C |
|----------------------|-------|

Controls and Dimming

| | |
|----------|-----|
| Dimmable | Yes |
|----------|-----|

Approval and Application

| | |
|-------------------------------|-------|
| Suitable For Accent Lighting | Yes |
| Energy Efficiency Label (EEL) | A+ |
| Energy Consumption kWh/1000 h | 5 kWh |


Product Data

| | |
|---------------------------------|---|
| Full product code | 871869670785200 |
| Order product name | MAS LED spot VLE D 4.9-50W GU10 927 36D |
| EAN/UPC - Product | 8718696707852 |
| Order code | 929001348802 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929001348802 |
| Net Weight (Piece) | 0.038 kg |

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



GU10 230V5W-50W 345lm 36D 2700K GU10 Dim

| Product | D | C |
|---|-------|-------|
| MAS LED spot VLE D 4.9-50W GU10 927 36D | 50 mm | 54 mm |

Photometric data

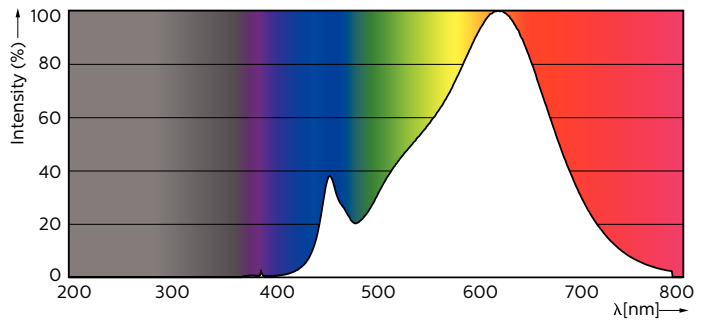

MASTER LEDspotMV 35W GU10 927 36D 260lm

MASTER VALUE LEDspot MV

