

# PHILIPS

## Lighting



# MASTER VALUE LEDspot MV

## MAS LED spot VLE D 7-80W GU10 865 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

### Product data

#### General Information

Cap-Base	GU10 [ GU10]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	7-80W

#### Light Technical

Color Code	865 [ CCT of 6500K]
Beam Angle (Nom)	36 °
Luminous Flux (Nom)	610 lm
Luminous Flux (Rated) (Nom)	610 lm
Luminous Intensity (Nom)	1200 cd
Color Designation	Cool Daylight
Rated Beam Angle	36 °
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	87.14 lm/W

Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Luminous Flux In 90° Cone (Rated)	610 lm

#### Operating and Electrical

Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	7 W
Lamp Current (Nom)	35 mA
Wattage Equivalent	80 W
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.8
Voltage (Nom)	220-240 V

# MASTER VALUE LEDspot MV

## Temperature

T-Case Maximum (Nom)	85 °C
----------------------	-------

## Controls and Dimming

Dimmable	Yes
----------	-----

## Approval and Application

Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	7 kWh


## Product Data

Full product code	871869670801900
Order product name	MAS LED spot VLE D 7-80W GU10 865 36D
EAN/UPC - Product	8718696708019
Order code	929001349602
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001349602
Net Weight (Piece)	0.038 kg

## Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights


## Dimensional drawing




GU10 230V7W-80W 570lm 36D 6500K GU10 Dim

Product	D	C
MAS LED spot VLE D 7-80W GU10 865 36D	50 mm	54 mm

## Photometric data



Copyright © 2017 Philips Lighting B.V. Page 11

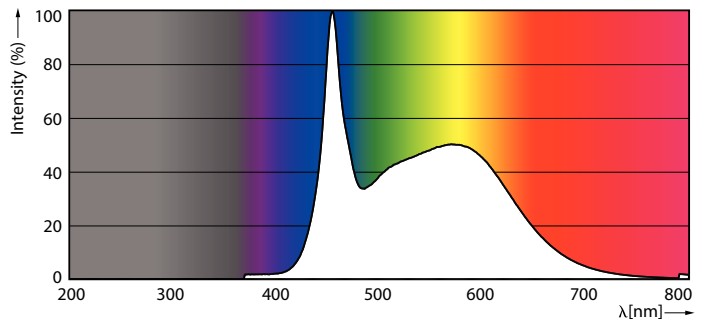

MASTER LEDspot MV 80W GU10 865 36D VLE

# MASTER VALUE LEDspot MV

