











( LED 4)				
	GR-938/4P	GR-938/6P	GR-939/4P	GR-939/6P
	220-240V AC/50-60Hz			
	4,6W/5 VA	5,8W/6,2 VA	5,2W/5,5 VA	6,1W/6,4 VA
(Ni-Cd)	4,8V/1,5Ah	4,8V/3Ah		4,8V/4Ah(Ni-MH)
A -	LED charge, lamp fault, battery fault,			(TEST)
	24			
	90		3	
	4 LED	6 LED	4 LED	6 LED
( / )	175lm / 350lm	245lm / 480lm	175lm / 350lm	245lm / 480lm
	IP65			
	EN 60598-1, EN 60598-2-22,	55015,	61547,	61000-3-2, 61000-3-3
	5 40 °C			
	μ 95%			
	Bayblend FR3010, polycarbonate			
	360 x 145 x 73 mm			
	915gr.	1005gr.		1060gr.
	3 (1 μ )			



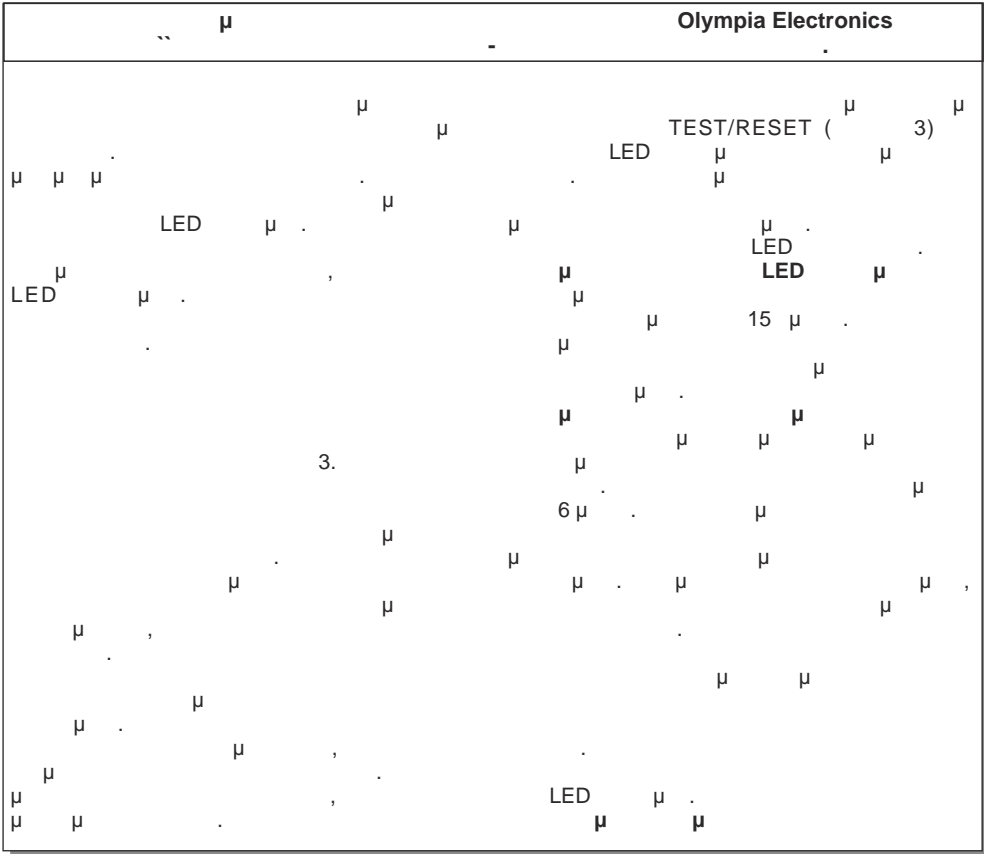

- ①
- ②
- ③ 9. ( H05RN-F 2x1mm<sup>2</sup> ) . ( 65). ( 1,2 Nm).
- ④
- ⑤
- ⑥ , L L1 ( ) . To L1 μ
- ⑦ μ μ L L ( L1. ) μ
- ⑧
- ⑨ μ
- ⑩ μ 4 μ ( 1,2 Nm).



- !! μ , μ μ 24
1. μ 4 ( μ 10 )
  2. μ 2 ( μ 9 )
  3. μ μ μ μ
  4. μ μ 1 2.

