

# Indicators

Our indicators are designed as an additional indication devices when sensors have been triggered. These products are designed to be used as indicators only, and not visual alarm devices (see p26 and 29 for EN54-23 certified VADs).

## Addressable remote indicator MRIAD



### Typical applications:

Monitoring multiple sensors within a specific area.  
Must be configured through site installer. The remote indicator can be programmed as a sounder.

## Standard remote indicator CIR301



### Typical applications:


The CIR301 can only be connected to one sensor and is powered by this sensor.  
There is a weather resistant version also available. (Not IP65).

## Staff warning device CAB382




### Typical applications:

As this product does not meet EN54-23 requirements as a beacon we recommend it as an internal warning device in offices, schools or manned reception areas.

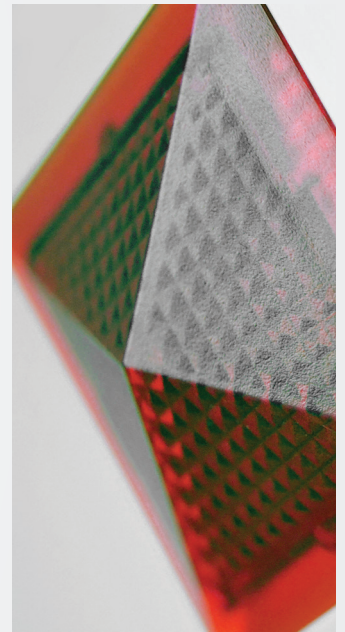


Remote indicator lens detail

## Dimensions

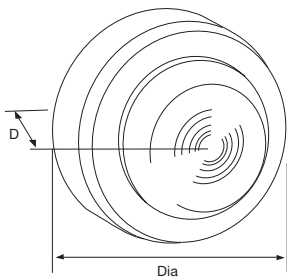

Staff warning device

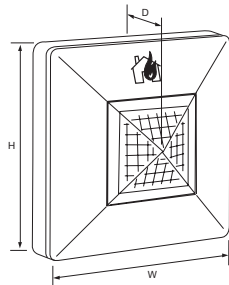

Remote indicators

Description	Diameter (mm)	Depth (mm)
Staff warning device	101	33

Description	Height (mm)	Width (mm)	Depth (mm)
Remote indicators	87	87	30

## Catalogue numbers

Description	Code
Loop connected remote indicator	MRIAD
Standard remote indicator	CIR301
Weather resistant standard remote indicator	CIR301WP
Staff warning device	CAB382