



94.04



Approvals
(according to type):



Relay type	55.32	55.33	55.32, 55.34	
Screw terminal socket: panel or 35 mm rail (EN 50022) mount	BLUE	94.02	94.03	94.04
	BLACK*	94.02.0	94.03.0	94.04.0
Retaining clip (supplied with socket)	094.71	094.71	094.71	
Identification tag	094.00.4	094.00.4	094.00.4	
Modules	99.02	99.02	99.02	
6 way jumper link for 94.02, 94.03 and 94.04 sockets	094.06	094.06	094.06	
Timer modules	86.10, 86.20	86.10, 86.20	86.10, 86.20	


- RATED VALUES: 10 A - 250 V
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- PROTECTION CATEGORY: IP 20
- AMBIENT TEMPERATURE: (-40...+70)°C
- TORQUE: 0.5 Nm
- MAX WIRE SIZE:

	solid wire	flexible wire
mm ²	1x6 / 2x2.5	1x4 / 2x2.5
AWG	1x10 / 2x14	1x12 / 2x14

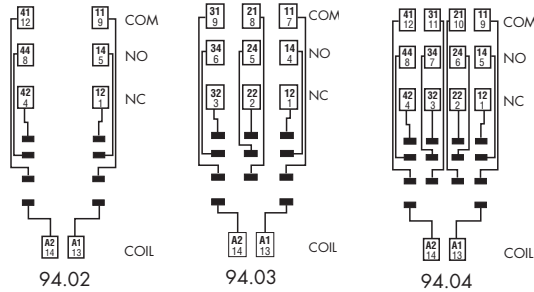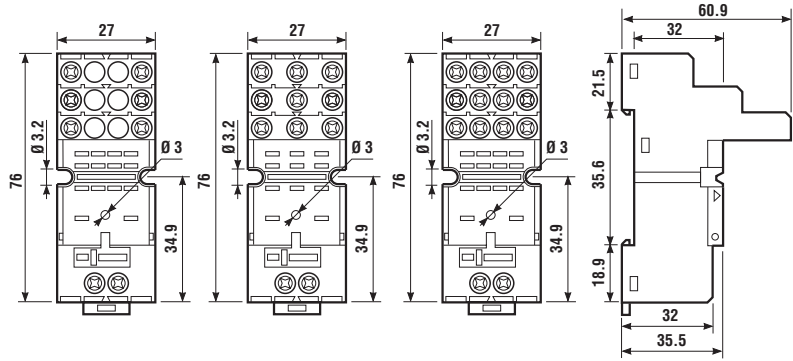


99.02

99 Series modules for 94.02, 94.03 and 94.04 sockets		BLUE	BLACK*
Diode	(6...220) V DC	99.02.3.000.00	99.02.3.000.00.0
Diode (inverted polarity)	(6...220) V DC	99.02.2.000.00	99.02.2.000.00.0
LED	(6...24) V DC/AC	99.02.0.024.59	99.02.0.024.59.0
LED	(28...60) V DC/AC	99.02.0.060.59	99.02.0.060.59.0
LED	(110...240) V DC/AC	99.02.0.230.59	99.02.0.230.59.0
LED + Diode	(6...24) V DC	99.02.9.024.99	99.02.9.024.99.0
LED + Diode	(28...60) V DC	99.02.9.060.99	99.02.9.060.99.0
LED + Diode	(110...220) V DC	99.02.9.220.99	99.02.9.220.99.0
LED + Diode (inverted polarity)	(6...24) V DC	99.02.9.024.79	99.02.9.024.79.0
LED + Diode (inverted polarity)	(28...60) V DC	99.02.9.060.79	99.02.9.060.79.0
LED + Diode (inverted polarity)	(110...220) V DC	99.02.9.220.79	99.02.9.220.79.0
LED + Varistor	(6...24) V DC/AC	99.02.0.024.98	99.02.0.024.98.0
LED + Varistor	(28...60) V DC/AC	99.02.0.060.98	99.02.0.060.98.0
LED + Varistor	(110...240) V DC/AC	99.02.0.230.98	99.02.0.230.98.0
RC circuit	(6...24) V DC/AC	99.02.0.024.09	99.02.0.024.09.0
RC circuit	(28...60) V DC/AC	99.02.0.060.09	99.02.0.060.09.0
RC circuit	(110...240) V DC/AC	99.02.0.230.09	99.02.0.230.09.0
No - remanence	(110...240) V AC	99.02.8.230.07	99.02.8.230.07.0



094.06

6-way jumper link for 94.02, 94.03 and 94.04 sockets	094.06
---	--------

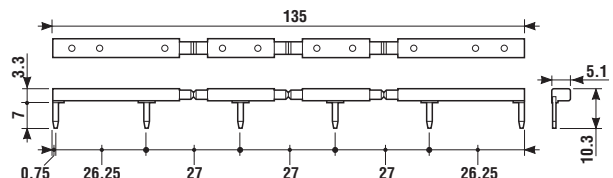

- RATED VALUES: 10 A - 250 V

* Available on request



94.74


Approvals
(according to type):



- RATED VALUES: 10 A - 250 V
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- PROTECTION CATEGORY: IP 20
- AMBIENT TEMPERATURE: $(-40...+70)^{\circ}\text{C}$
- TORQUE: 0.5 Nm
- MAX WIRE SIZE:

	solid wire	flexible wire
mm ²	1x2.5 / 2x1.5	1x2.5 / 2x1.5
AWG	1x14 / 2x16	1x14 / 2x16

Relay type	55.32	55.33	55.32, 55.34	
Screw terminal socket: panel or 35 mm rail (EN 50022) mount	BLUE	94.72	94.73	94.74
	BLACK*	94.72.0	94.73.0	94.74.0
Retaining clip (supplied with sockets)	094.71	094.71	094.71	
Modules	99.01	99.01	99.01	

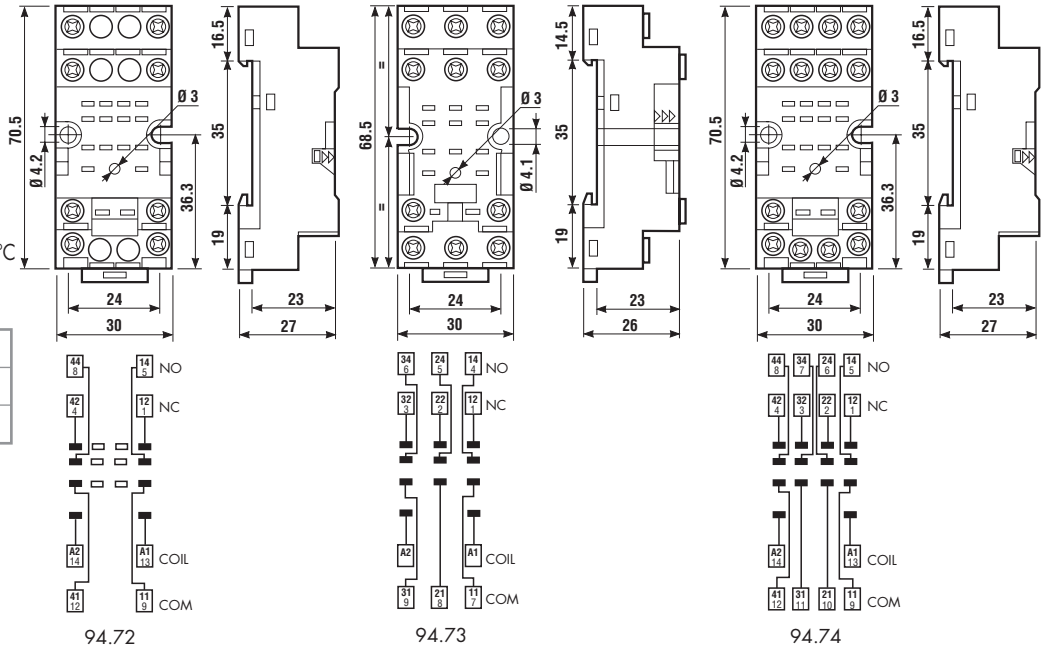

94.82


Approvals
(according to type):



- RATED VALUES: 10 A - 250 V
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- PROTECTION CATEGORY: IP 20
- AMBIENT TEMPERATURE: $(-40...+70)^{\circ}\text{C}$
- TORQUE: 0.5 Nm
- MAX WIRE SIZE:

	solid wire	flexible wire
mm ²	1x2.5 / 2x1.5	1x2.5 / 2x1.5
AWG	1x14 / 2x16	1x14 / 2x16

Relay type	55.32	55.33	55.32, 55.34	
Screw terminal socket: panel or 35 mm rail (EN 50022) mount	BLUE	94.82	—	—
	BLACK*	94.82.0	—	—
Retaining clip (supplied with sockets)	094.71	—	—	—
Modules	99.01	—	—	—

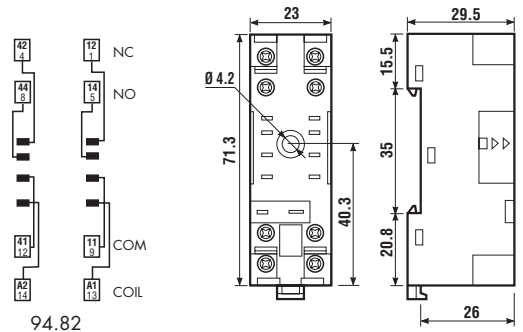

99.01

99 Series modules for 94.72, 94.73, 94.74 and 94.82 sockets	BLUE	BLACK*
Diode (6...220) V DC	99.01.3.000.00	99.01.3.000.00.0
Diode (inverted polarity) (6...220) V DC	99.01.2.000.00	99.01.2.000.00.0
LED (6...24) V DC/AC	99.01.0.024.59	99.01.0.024.59.0
LED (28...60) V DC/AC	99.01.0.060.59	99.01.0.060.59.0
LED (110...240) V DC/AC	99.01.0.230.59	99.01.0.230.59.0
LED + Diode (6...24) V DC	99.01.9.024.99	99.01.9.024.99.0
LED + Diode (28...60) V DC	99.01.9.060.99	99.01.9.060.99.0
LED + Diode (110...220) V DC	99.01.9.220.99	99.01.9.220.99.0
LED + Diode (inverted polarity) (6...24) V DC	99.01.9.024.79	99.01.9.024.79.0
LED + Diode (inverted polarity) (28...60) V DC	99.01.9.060.79	99.01.9.060.79.0
LED + Diode (inverted polarity) (110...220) V DC	99.01.9.220.79	99.01.9.220.79.0
LED + Varistor (6...24) V DC/AC	99.01.0.024.98	99.01.0.024.98.0
LED + Varistor (28...60) V DC/AC	99.01.0.060.98	99.01.0.060.98.0
LED + Varistor (110...240) V DC/AC	99.01.0.230.98	99.01.0.230.98.0
RC circuit (6...24) V DC/AC	99.01.0.024.09	99.01.0.024.09.0
RC circuit (28...60) V DC/AC	99.01.0.060.09	99.01.0.060.09.0
RC circuit (110...240) V DC/AC	99.01.0.230.09	99.01.0.230.09.0
No - remanence (110...240) V AC	99.01.8.230.07	99.01.8.230.07.0

* Available on request



94.84.1


Approvals
(according to type):



- RATED VALUES: 10 A - 250 V
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- PROTECTION CATEGORY: IP 20
- AMBIENT TEMPERATURE: (-40...+70)°C
- TORQUE: 0.5 Nm
- MAX WIRE SIZE:

	solid wire	flexible wire
mm ²	1x6 / 2x2.5	1x4 / 2x2.5
AWG	1x10 / 2x14	1x12 / 2x14

Relay type	55.32, 55.34	
Screw terminal socket: panel or 35 mm rail (EN 50022) mount	BLUE	94.84.1
	BLACK*	94.84.10
Retaining clip (supplied with socket)		094.91
Identification tag		094.80.2
Modules		99.80

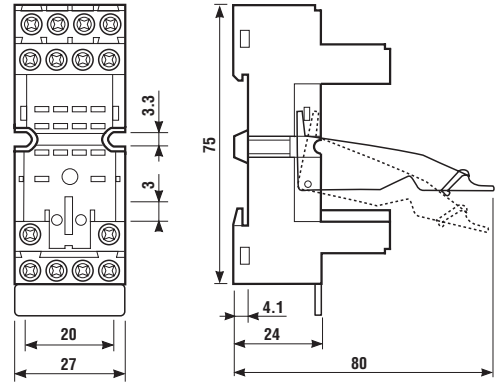

94.84.1



99.80

99 Series modules for 94.84.1 sockets		BLUE	BLACK*
Diode	(6...220) V DC	99.80.3.000.00	99.80.3.000.00.0
LED	(6...24) V DC/AC	99.80.0.024.59	99.80.0.024.59.0
LED	(28...60) V DC/AC	99.80.0.060.59	99.80.0.060.59.0
LED	(110...240) V DC/AC	99.80.0.230.59	99.80.0.230.59.0
LED + Diode	(6...24) V DC	99.80.9.024.99	99.80.9.024.99.0
LED + Diode	(28...60) V DC	99.80.9.060.99	99.80.9.060.99.0
LED + Diode	(110...220) V DC	99.80.9.220.99	99.80.9.220.99.0
LED + Varistor	(6...24) V DC/AC	99.80.0.024.98	99.80.0.024.98.0
LED + Varistor	(28...60) V DC/AC	99.80.0.060.98	99.80.0.060.98.0
LED + Varistor	(110...240) V DC/AC	99.80.0.230.98	99.80.0.230.98.0
RC circuit	(6...24) V DC/AC	99.80.0.024.09	99.80.0.024.09.0
RC circuit	(28...60) V DC/AC	99.80.0.060.09	99.80.0.060.09.0
RC circuit	(110...240) V DC/AC	99.80.0.230.09	99.80.0.230.09.0
No - remanence	(110...240) V AC	99.80.8.230.07	99.80.8.230.07.0




94.14

Approvals
(according to type):



- RATED VALUES: 10 A - 250 V
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- AMBIENT TEMPERATURE: (-40...+70)°C

Relay type	55.32	55.33	55.32, 55.34
P.C.B. socket	BLUE	94.12	94.13
	BLACK*	94.12.0	94.13.0
Metal retaining clip (supplied with sockets)		094.51	094.51

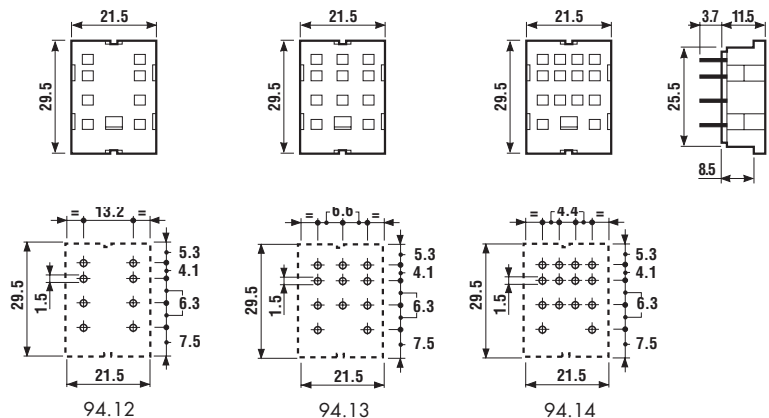


* Available on request



Relay type	55.32	55.33	55.32, 55.34	
Panel mount solder socket: 1 mm thick panel	BLUE	94.22	94.23	94.24
	BLACK*	94.22.0	94.23.0	94.24.0
Metal retaining clip (supplied with sockets)	094.51	094.51	094.51	

Approvals
(according to type):


- RATED VALUES: 10 A - 250 V
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- AMBIENT TEMPERATURE: (-40...+70)°C

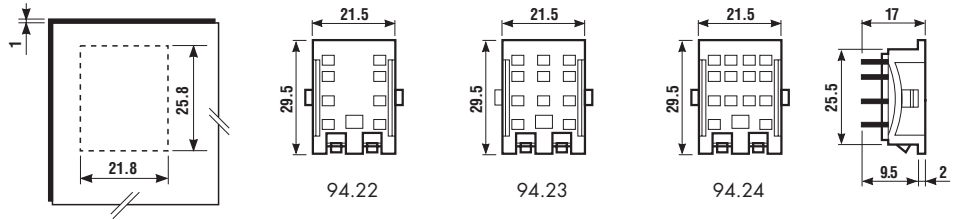

Relay type	55.32	55.33	55.32, 55.34	
Panel mount socket: M3 screw mount	BLUE	94.32	94.33	94.34
	BLACK*	94.32.0	94.33.0	94.34.0
Metal retaining clip (supplied with sockets)	094.51	094.51	094.51	

Approvals
(according to type):

- RATED VALUES: 10 A - 250 V
- DIELECTRIC STRENGTH: ≥ 2 kV AC
- AMBIENT TEMPERATURE: (-40...+70)°C

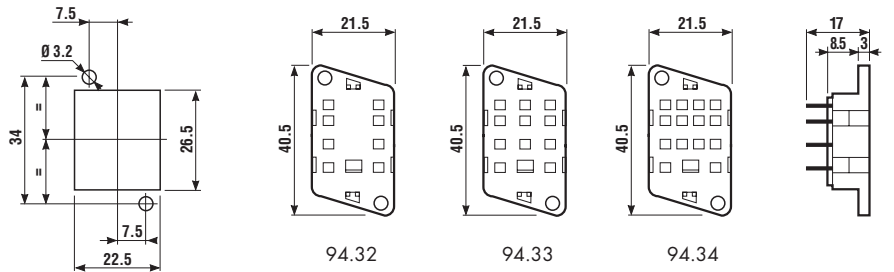

* Available on request