

# 4.7

## Outdoor emergency lighting

Zetalite 3



- Versatile multi-functional use (escape, open area anti-panic and exit signage)
- Exit sign viewing distance of up to 20 meters
- IP65 ingress protection suitable for indoor and outdoor applications
- Low power consumption reducing cost of ownership
- Configurable as Maintained or Non-Maintained operation

### Light Source:


12 x 0.25W white LED  
50,000 hour life LED (L80)  
for reduced maintenance

Zetalite 3 is the first LED luminaire designed specifically for optimal performance from an LED light source. The result is exceptional performance, stunning uniformity and low energy usage at a traditional 8W bulkhead price point.

Zetalite 3 is suitable for use as an escape route, open area anti-panic emergency lighting and external over door lighting to provide safe way out of buildings. In addition to emergency lighting, Zetalite 3 is also suitable for use as an exit sign with the application of the optional stick on legend kit.

### Materials:

Luminaire Body - flame retardant ABS  
Luminaire Lens - clear polycarbonate  
NiCd battery

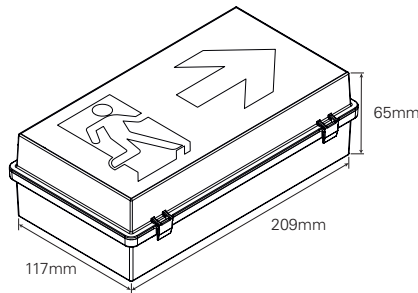

### Operation:

Maintained mode 5VA/4W  
Non-Maintained mode 3.5VA/2.3W

### Installation:

Luminaire can be operated in Maintained or Non-Maintained mode  
Use either as emergency luminaire or exit sign



Self-adhesive legend ISO7010 format and European format available



Configurable as Maintained or Non-Maintained operation

### Applications:

Industrial and all outdoor applications

Model	Height (m)	Lux level directly under	Distance for 1 Lux (escape route 2m wide)				Distance for 0,5 Lux (open anti-panic)			
ZEL3ICEL										
	02,50	04,50	02,90	07,50	02,80	07,10	03,40	08,10	02,80	07,90
	02,80	03,80	02,90	07,80	02,90	07,40	03,50	08,50	02,90	08,30
	03,00	03,40	03,10	08,00	03,00	07,60	03,50	08,70	03,00	08,60
	04,00	02,00	02,60	08,50	02,60	08,20	03,40	09,80	02,60	09,60
	05,00	01,30	02,00	08,10	02,00	08,00	03,40	10,50	02,00	10,40

Order code	Description				
ZEL3ICEL	Zeta III 3Hr	12 x 0,25W LED	180'	2,4V-4Ah NiCd	Maintained / Non-Maintained
<b>Accessories</b>					
ZELLEG	Euro Picto legend kit				
ZELLEG-ISO	ISO7010 Picto legend kit				