



**EWK wall-mount enclosure with standard mounting units, 144 SU, IP43, IK09, protection class 2, RAL9016, HxWxB=950x550x160mm**

**Part no.** EWK-05091  
**Catalog No.** 174664  
**Eaton Catalog No.** EWK-05091  
**EL-Nummer (Norway)** 2455852

## Delivery program

Basic function			Basic device
Product function			Installation distribution boards
Product range			EWK DBO
Design			Surface mounted
Installation site			Indoor
Type of installation			Surface mounting
Door/Flap			White
Degree of Protection			IP43
Colour			White
Module rack			Rail-frame
Shroud for protection against accidental contact			Plastic
Rows	Count		6
Module units per row			24
Description			IP43 Protection Class II Steel sheet enclosure white (RAL 9016)
Cable entries			Cable entries on top and bottom, back plate
PE and N terminals design			Plug-in terminals
PE and N terminals	Number x cross- sectional area	mm <sup>2</sup>	PE: 2 x 6 x (1.5 - 16) N: 2 x 21 x (0.75 - 4)
Equipment supplied			Enclosure Installation panel for modular installation devices Neutral-/protective conductor terminal Locking screws can be sealed Two-component membrane gland plate insert

## Technical data

### General

Standards			EN 61439-3
RoHS (in accordance with Directive 2002/95/EC of the European Parliament and Council)			conform
Ambient temperature		°C	-5 - +40
Degree of Protection			IP43
Protection class			II (totally insulated)
Rated operational voltage	U <sub>e</sub>	V AC	400
Rated frequency	f	Hz	50

### Material characteristics

Material			Sheet steel, powder-coated Polystyren (plastic)
Colour			white (RAL 9016)

### Material properties

Mechanical			
Impact resistance			IK09

## Design verification as per IEC/EN 61439

Technical data for design verification			
Heat dissipation, at an ambient temperature of 35°C, delta T: 20 degrees, calculated as per IEC 60890			
Individual enclosure for wall mounting	P <sub>v</sub>	CO	64


Starting enclosure for wall mounting	P <sub>V</sub>	CO	61
Middle enclosure for wall mounting	P <sub>V</sub>	CO	58
Heat dissipation, at an ambient temperature of 35°C, delta T: 35 degrees, calculated as per IEC 60890			
Individual enclosure for wall mounting	P <sub>V</sub>	CO	129
Starting enclosure for wall mounting	P <sub>V</sub>	CO	123
Middle enclosure for wall mounting	P <sub>V</sub>	CO	116
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			750 °C; meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			
			Not relevant to indoor installations.
10.2.5 Lifting			
			Does not apply to enclosures without lifting aids.
10.2.6 Mechanical impact			
			IK09
10.2.7 Inscriptions			
			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			
			IP43
10.4 Clearances and creepage distances			
			Is the panel builder's responsibility.
10.5 Protection against electric shock			
			Protection class 2, therefore not applicable.
10.6 Incorporation of switching devices and components			
			Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections			
			Is the panel builder's responsibility.
10.8 Connections for external conductors			
			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			
			U <sub>i</sub> = 400 V AC
10.9.3 Impulse withstand voltage			
			3 kV
10.9.4 Testing of enclosures made of insulating material			
			Does not apply to metal enclosures.
10.10 Temperature rise			
			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			
			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			
			Is the panel builder's responsibility.
10.13 Mechanical function			
			Meets the product standard's requirements.

## Technical data ETIM 6.0

Cabinet enclosures (EG000011) / Enclosure/switchgear cabinet (empty) (EC000261)			
Electric engineering, automation, process control engineering / Electrical cabinet, housing, rack / Electrical cabinet (empty) / Electrical cabinet (ecl@ss8.1-27-18-01-01 [AGZ056013])			
Width	mm		550
Height	mm		950
Depth	mm		160
Material			Steel
Type of surface			With powder coating
Colour			White
RAL-number			9016
With mounting plate			No
Mounting plate depth-adjustable			No
Number of locks			1
Floor installation possible			No
Wall fastening possible			Yes
Wall build in			Yes
Pole fastening			No
Tackable			Yes
Number of doors			1
Suitable for metrical mounting			Yes
Suitable for outdoor set-up			No
Pitched roof			No

EMC-version		Yes
Impact strength		IK09
Degree of protection (IP)		IP43
With glazed door		No
With ventilation door		No
With backside door		No

## Dimensions

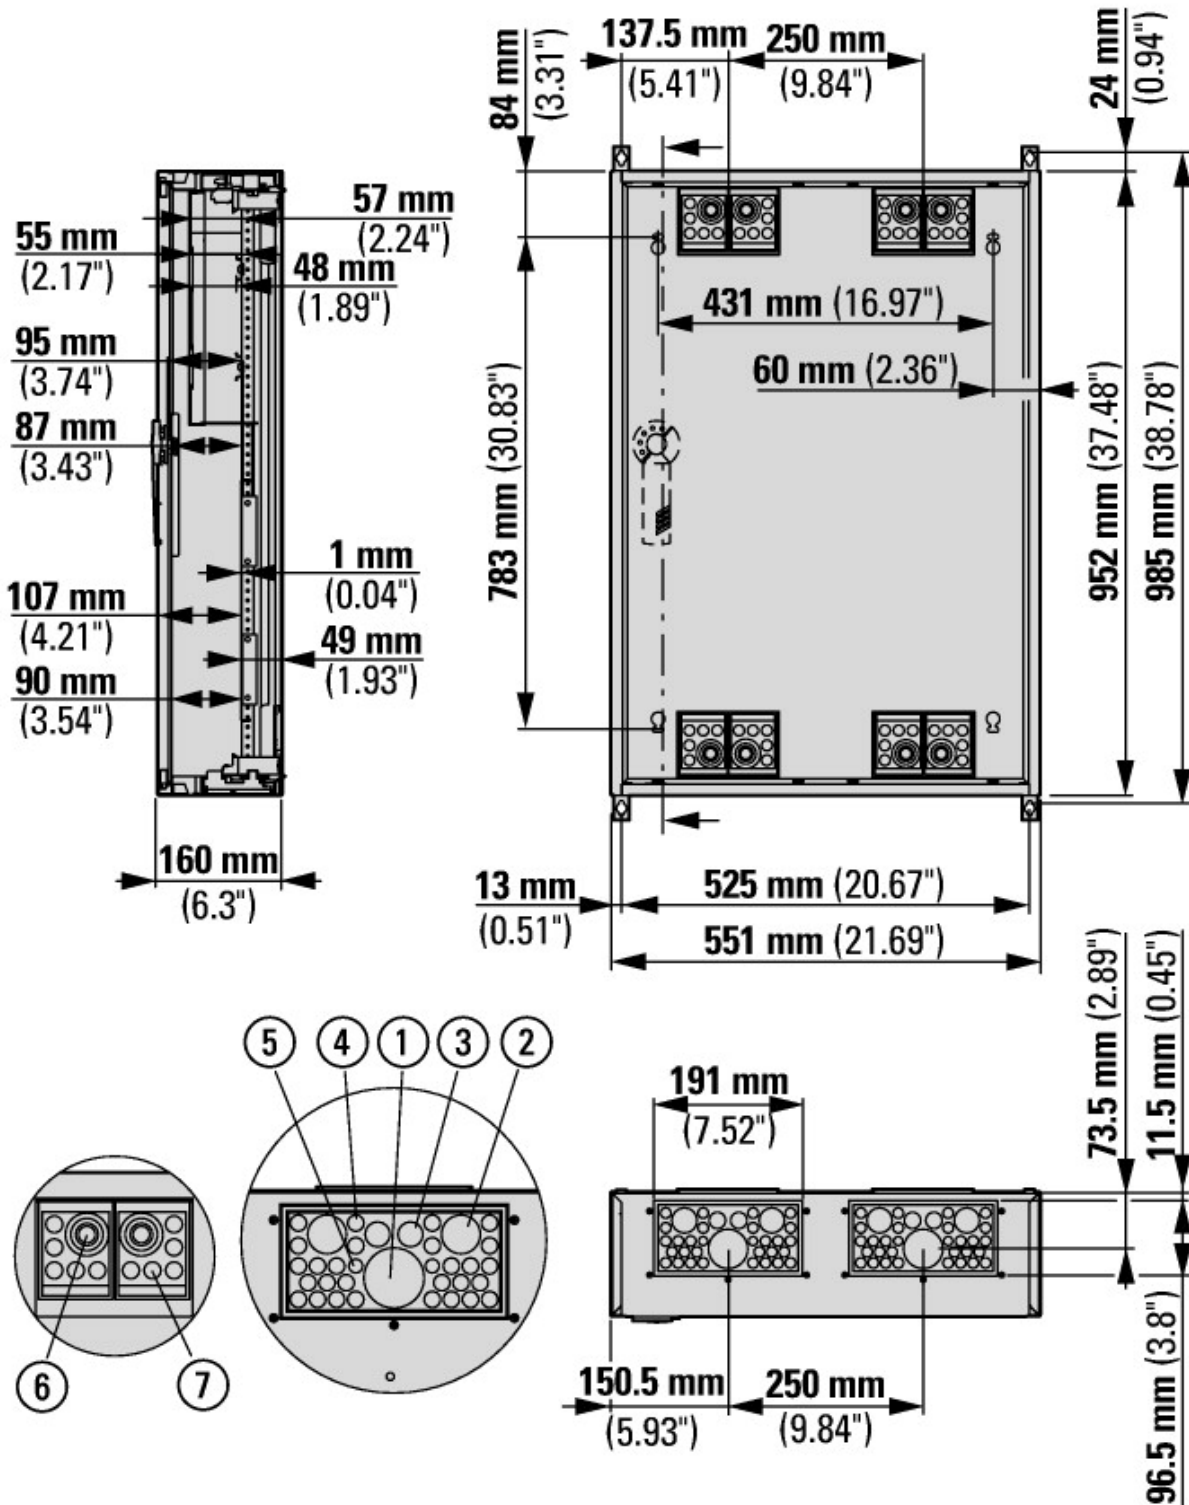

- ① 1 x ∅ 5 - 74 mm
- ② 2 x ∅ 5 - 29 mm
- ③ 2 x ∅ 5 - 18 mm
- ④ 28 x ∅ 5 - 11 mm
- ⑤ 2 x ∅ 5 - 9 mm
- ⑥ 2 x ∅ 16/21/29/38 mm

## Additional product information (links)

### IL014004Z EWK enclosures for DIN rail-mounted devices

IL014004Z EWK enclosures for DIN rail-mounted devices

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL014004ZU2014\\_04.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL014004ZU2014_04.pdf)

Product overview (Web)

<http://www.eaton.eu/DE/Europe/Electrical/ProductsServices/Residential/index.htm>