



CorePro LED candles and lusters

CorePro LEDcandle ND 5.5-40W E14 865 B35 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps, and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters, and are available in either warm white, white or cool daylight color temperatures. LED lamps deliver huge energy savings and minimize maintenance cost. The CorePro LED candles and lusters are perfect for your basic lighting needs. They provide the beautiful light and dependable performance you expect from LED at an affordable price.

Product data

General Information		LLMF At End Of Nominal Lifetime (Nom) 70 %	
Cap-Base	E14 [E14]		
Nominal Lifetime (Nom)	15000 h		
Switching Cycle	50000X		
Technical Type	5.5-40W		
Light Technical		Operating and Electrical	
Color Code	865 [CCT of 6500K]	Input Frequency	50 to 60 Hz
Luminous Flux (Nom)	520 lm	Power (Rated) (Nom)	5.5 W
Luminous Flux (Rated) (Nom)	520 lm	Lamp Current (Nom)	50 mA
Color Designation	Cool Daylight	Wattage Equivalent	40 W
Correlated Color Temperature (Nom)	6500 K	Starting Time (Nom)	0.5 s
Luminous Efficacy (rated) (Nom)	94.55 lm/W	Warm Up Time To 60% Light (Nom)	0.5 s
Color Consistency	<6	Power Factor (Nom)	0.5
Color Rendering Index (Nom)	80	Voltage (Nom)	220-240 V
		Temperature	
		T-Case Maximum (Nom)	85 °C

CorePro LED candles and lusters

Controls and Dimming

Dimmable No

Mechanical and Housing

Bulb Finish Frosted

Approval and Application

Energy Efficiency Label (EEL) A+


Energy Consumption kWh/1000 h 6 kWh

Product Data

Full product code 871869674681300

Order product name	CorePro LEDcandle ND 5.5-40W E14 865 B35 FR
EAN/UPC - Product	8718696746813
Order code	929001394502
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001394502
Net Weight (Piece)	0.040 kg


Dimensional drawing

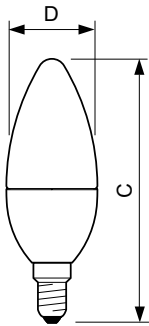


Candle B35 5.5-40W 520lm 6500K E14 ND FR

Product	D	C
CorePro LEDcandle ND 5.5-40W E14 865 B35 FR	35 mm	106 mm

Photometric data

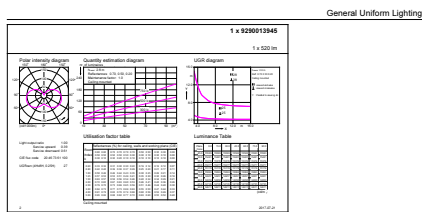


General Uniform Lighting
CatuLux Photometrics 4.5 Philips Lighting B.V. Page: 1/1

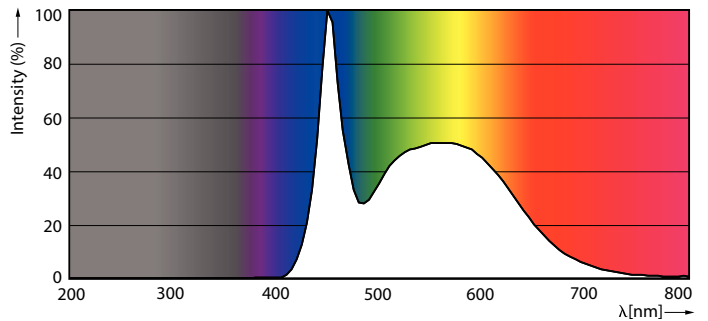

CorePro LEDcandle 40W E14 865 FR B35


CorePro LED candles and lusters

Photometric data

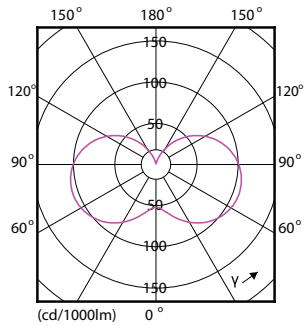


CorePro LEDcandle 40W E14 865 FR B35

Lifetime

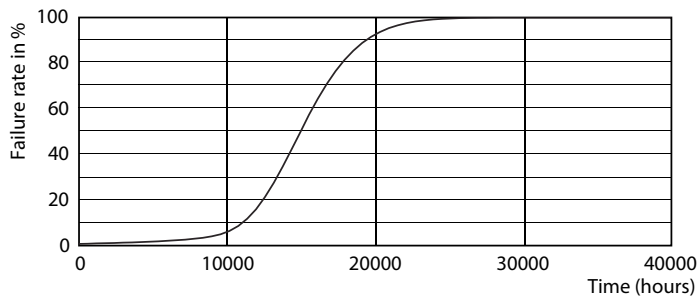

LEDbulb 60W E14 827 FR B38

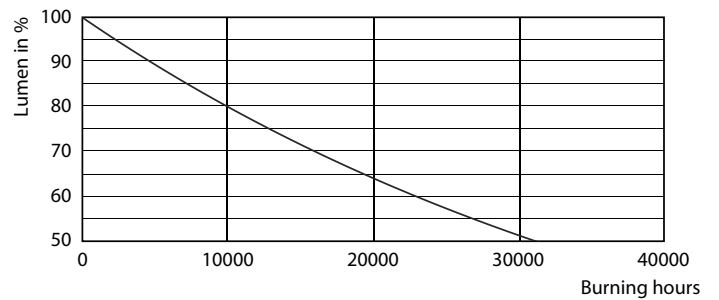

LEDbulb 60W E14 827 FR B38

