



CorePro LED candles and lusters

CorePro LEDcandle ND 7-60W E14 865 B38 FR

The CorePro LEDcandles and lusters are designed for retrofit replacement of incandescent lamps, and are particularly attractive for chandeliers. They are compatible with fixtures with an E14 holder for candles and E14 or E27 holders for lusters, and are available in either warm white, white or cool daylight color temperatures. LED lamps deliver huge energy savings and minimize maintenance cost. The CorePro LED candles and lusters are perfect for your basic lighting needs. They provide the beautiful light and dependable performance you expect from LED at an affordable price.

Product data

General Information		LLMF At End Of Nominal Lifetime (Nom)	
Cap-Base	E14 [E14]		70 %
Nominal Lifetime (Nom)	15000 h	Operating and Electrical	
Switching Cycle	50000X	Input Frequency	50 to 60 Hz
Technical Type	7-60W	Power (Rated) (Nom)	7 W
Light Technical		Lamp Current (Nom)	65 mA
Color Code	865 [CCT of 6500K]	Wattage Equivalent	60 W
Luminous Flux (Nom)	830 lm	Starting Time (Nom)	0.5 s
Luminous Flux (Rated) (Nom)	830 lm	Warm Up Time To 60% Light (Nom)	0.5 s
Color Designation	Cool Daylight	Power Factor (Nom)	0.5
Correlated Color Temperature (Nom)	6500 K	Voltage (Nom)	220-240 V
Luminous Efficacy (rated) (Nom)	118.57 lm/W	Temperature	
Color Consistency	<6	T-Case Maximum (Nom)	90 °C
Color Rendering Index (Nom)	80		

CorePro LED candles and lusters

Controls and Dimming

Dimmable No

Mechanical and Housing

Bulb Finish Frosted

Approval and Application

Energy Efficiency Label (EEL) A++


Energy Consumption kWh/1000 h 7 kWh

Product Data

Full product code 871869674685100

Order product name	CorePro LEDcandle ND 7-60W E14 865 B38 FR
EAN/UPC - Product	8718696746851
Order code	929001394702
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001394702
Net Weight (Piece)	0.063 kg


Dimensional drawing

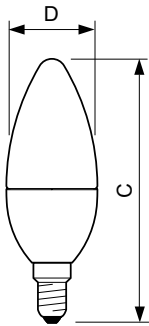


Candle B38 7-60W 830lm 6500K E14 ND FR

Product	D	C
CorePro LEDcandle ND 7-60W E14 865 B38 FR	38 mm	114 mm

Photometric data

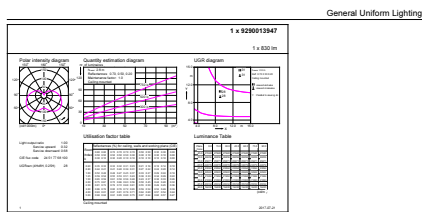


CalcLux Photometrics 4.5 Philips Lighting B.V. Page: 1/1

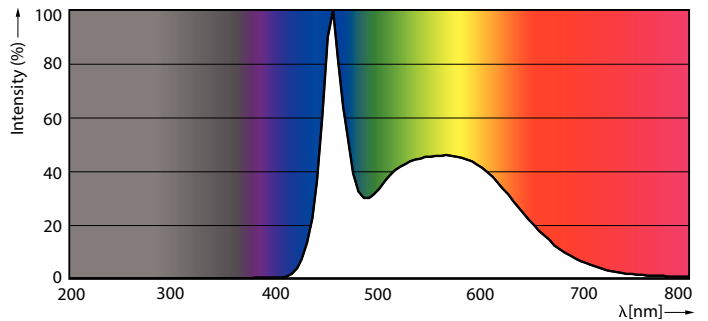

CorePro LEDcandle 60W E14 865 FR B38


CorePro LED candles and lusters

Photometric data




CorePro LEDcandle 60W E14 865 FR B38

Lifetime

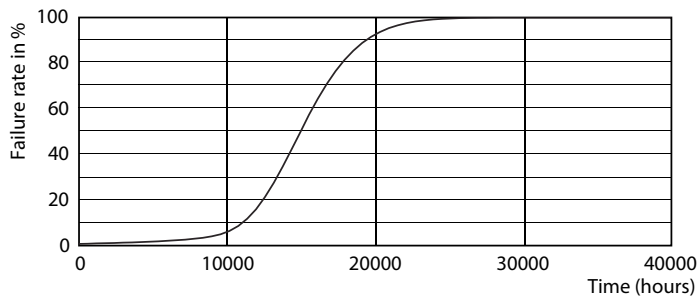

LEDbulb 60W E14 827 FR B38

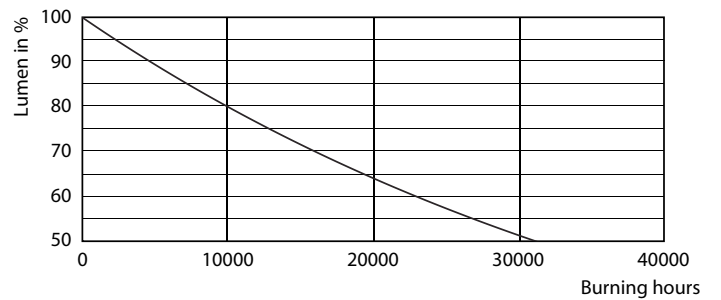

LEDbulb 60W E14 827 FR B38

