



Interlock, mechanical, for remote operator

Part no. N3M3/4-XMVR
Catalog No. 104546

Similar to illustration

Delivery program

Description		For 2 switches of the same or next frame size with each other Mounting beside one another
For use with		N3M3(-4), N(S)3(-4) + N3M4(-4), N(S)4(-4)
Notes		
Type contains parts for both switch sides.		
Extension shaft additionally required.		
Max. switch clearances Engineering		
Can not be combined with rotary handles, door coupling rotary handles, early-make auxiliary contacts, and direct-switching remote operator N3M2-XRD.		


Design verification as per IEC/EN 61439

IEC/EN 61439 design verification		
10.2 Strength of materials and parts		
10.2.2 Corrosion resistance		Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures		Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation		Meets the product standard's requirements.
10.2.5 Lifting		Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 6.0

Low-voltage industrial components (EG000017) / Mechanic interlock for switch (EC001044)		
Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Mechanic interlock for switch (ecl@ss8.1-27-37-13-03 [AKN341010])		
Auxiliary contacts, extendable		No
Number of contacts as normally closed contact		0
Number of contacts as normally open contact		0

Dimensions

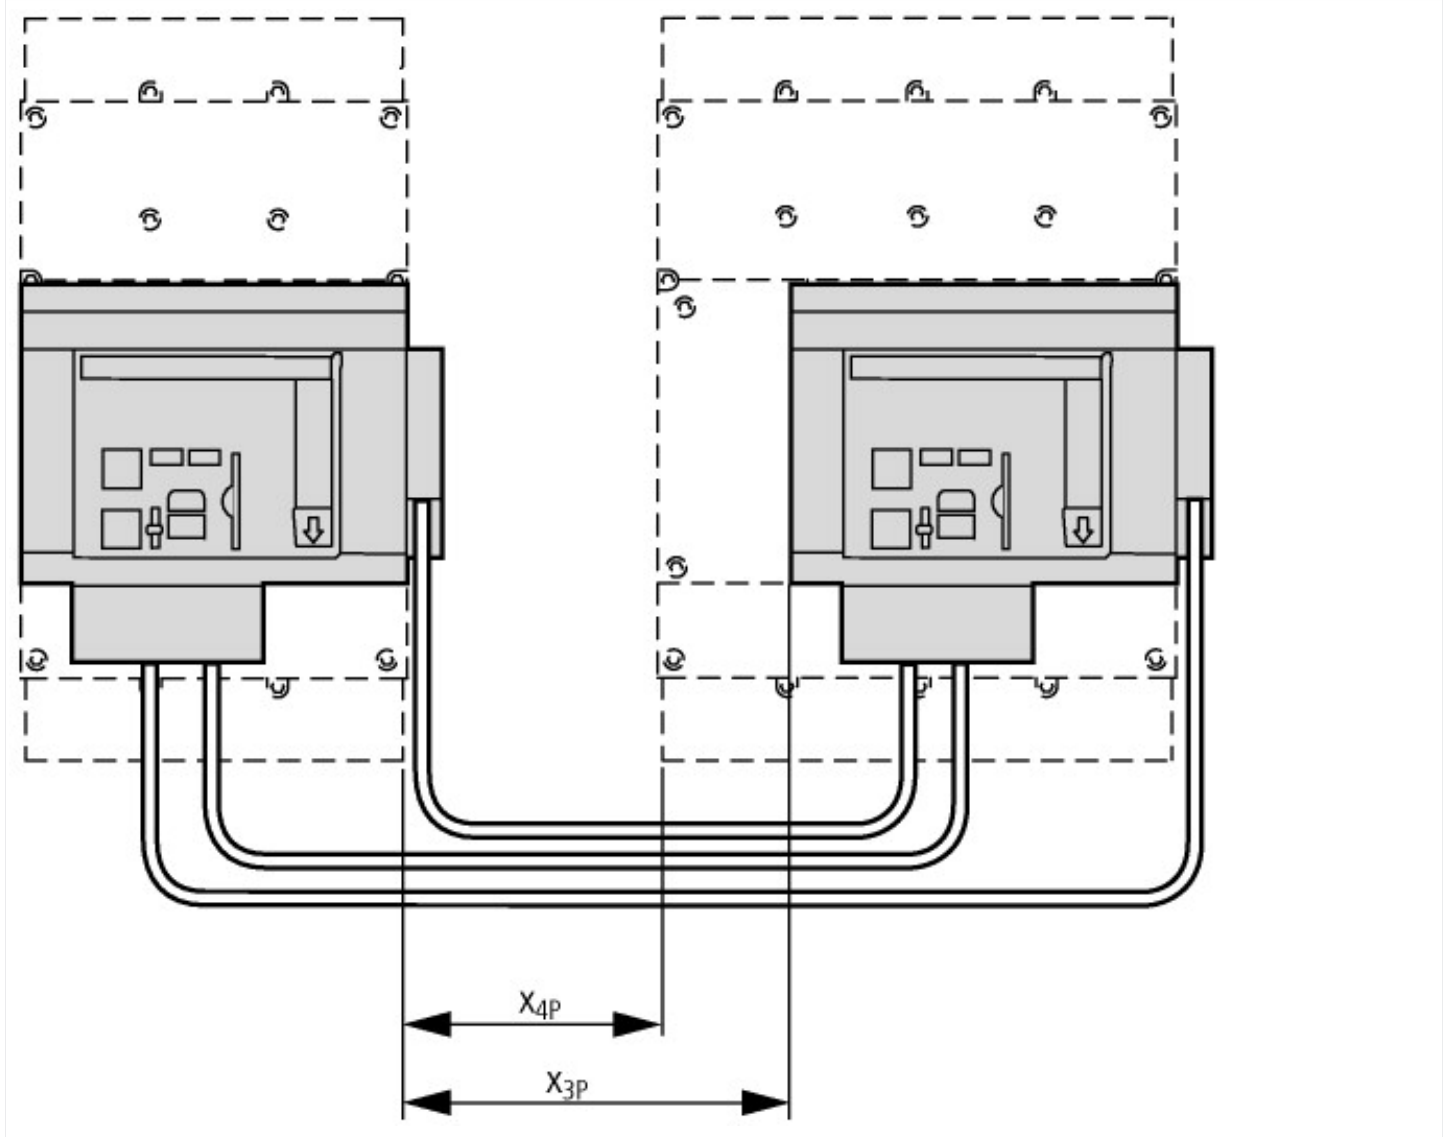

Additional product information (links)

IL01219034Z (AWA1230-2335) mechanical interlock for NZM4 remote operator

IL01219034Z (AWA1230-2335) mechanical interlock for NZM4 remote operator ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219034Z2012_09.pdf

IL01219035Z (AWA1230-2350) mechanical interlock for NZM2 remote operator

IL01219035Z (AWA1230-2350) mechanical interlock for NZM2 remote operator ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL01219035Z2012_09.pdf