



MASTER VALUE LEDspot MV

MAS LED spot VLE D 4.9-50W GU10 930 36D

Delivering a warm, halogen-like accent beam, MASTER VALUE LEDspot MV is a perfect for spot lighting. Thanks to its high CRI, it realizes more natural colors, enabling cozy and comfortable ambience for residential, hospitality and emphasize the beauty of merchandise in retail. These LEDspots have the familiar look and feel of glass spots, keeping the classic beauty of glass spots and adding the strong performance from LED technology. The dimming function enables to create the desired atmosphere and it works with broad selection of dimmers.

Product data

General Information		Color Consistency	
Cap-Base	GU10 [GU10]	Color Consistency	<6
Nominal Lifetime (Nom)	25000 h	Color Rendering Index (Nom)	90
Switching Cycle	50000X	LLMF At End Of Nominal Lifetime (Nom)	70 %
Technical Type	4.9-50W	Luminous Flux In 90° Cone (Rated)	365 lm
Light Technical		Operating and Electrical	
Color Code	930 [CCT of 3000K]	Input Frequency	50 to 60 Hz
Beam Angle (Nom)	36 °	Power (Rated) (Nom)	4.9 W
Luminous Flux (Nom)	365 lm	Lamp Current (Nom)	27 mA
Luminous Flux (Rated) (Nom)	365 lm	Wattage Equivalent	50 W
Luminous Intensity (Nom)	650 cd	Starting Time (Nom)	0.5 s
Color Designation	White (WH)	Warm Up Time To 60% Light (Nom)	0.5 s
Rated Beam Angle	36 °	Power Factor (Nom)	0.8
Correlated Color Temperature (Nom)	3000 K	Voltage (Nom)	220-240 V
Luminous Efficacy (rated) (Nom)	82.65 lm/W		

MASTER VALUE LEDspot MV

Temperature

T-Case Maximum (Nom)	80 °C
----------------------	-------

Controls and Dimming

Dimmable	Yes
----------	-----

Approval and Application

Suitable For Accent Lighting	Yes
Energy Efficiency Label (EEL)	A+
Energy Consumption kWh/1000 h	5 kWh


Product Data

Full product code	871869670787600
Order product name	MAS LED spot VLE D 4.9-50W GU10 930 36D
EAN/UPC - Product	8718696707876
Order code	929001348902
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001348902
Net Weight (Piece)	0.038 kg

Warnings and Safety

- Operating temperature range is between -20° C and 45° C ambient
- Only to apply in dry or damp locations and most of open fixtures with lamp-holders that offer sufficient space (10 mm free air space)
- Not intended for use with emergency light fixtures or exit lights



Dimensional drawing



GU10 230V5W-50W 355lm 36D 3000K GU10 Dim

Product	D	C
MAS LED spot VLE D 4.9-50W GU10 930 36D	50 mm	54 mm

Photometric data

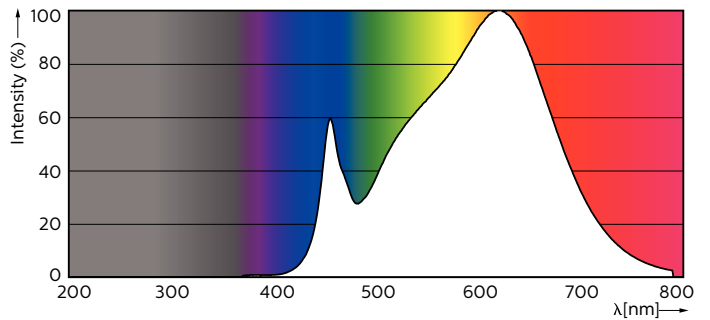

MASTER LEDspotMV 35W GU10 930 36D 270lm

MASTER VALUE LEDspot MV

